



TVM-5006

Service Manual - TVM-5006


BILL OF MATERIAL

MODEL:SFTV-62C(TVM-500 6K/S)	DOC	01	DATE			
PARTS	QTY					
RT-1/6W	82					
RT-1/4W	7					
RT-1/2W±5%	3					
POTENTIONMETER						
•						
HORRIZONTAL	3					
VERTICAL:	2					
ROUND	2					

CC-63V±10%	53			
CL11-100V±10%	10			

CD11-16V +80%-10%	35			
DIODE:	15			
Zener diode :	2			
TRIODE:	16			
B834	1			
D880	1			
IC:	1			
CD5151CP	1			
CD22427	1			
INDUCTANCE.				
DEFLECTION YOKE 5.5B"	1			
FBT 5.5"	1			
10X105.5M	1			
10X10 38M	1			
AMΦ10X70	1			


Inductance 15•H	1	L05		
SAWF38.9M	1	F201 ACCORDING TO TV SYSTEM		
Ceramic filter L5.5M	1	F202 ACCORDING TO TV SYSTEM		
Ceramic filter X5.5M	1	F203 ACCORDING TO TV SYSTEM		
443DF-1DF4	1	CVP		
jack. DC input	1	DC		
CRT socket 55#	1			
VDE approved jack	1			
jack(for TV62 only)	1	EAR		
Earphone jack	1	ANT		
switch•SK23H03M09	2			
BG/L power switch SK-22D02	1	K3		
2X2 switch (73#)	1 •	K3		
tuner	1	TU01 ACCORDING TO TV SYSTEM		
CRT 5.7" (right angle)	1			
antenna•TV61•	1			
Speaker :1W-8•2.5	1	SP		
230V/50Hz 13.5V 62# built-in transformer	1			
75•Ext .Ant . jack	1			
PCB•				
Circuit boardTV-62.PCB	1			
plastic	SET			
GIFTBOX, POLYFOAM, PLATE, PACKAGE BAG, INSTRUCTION MANUAL				

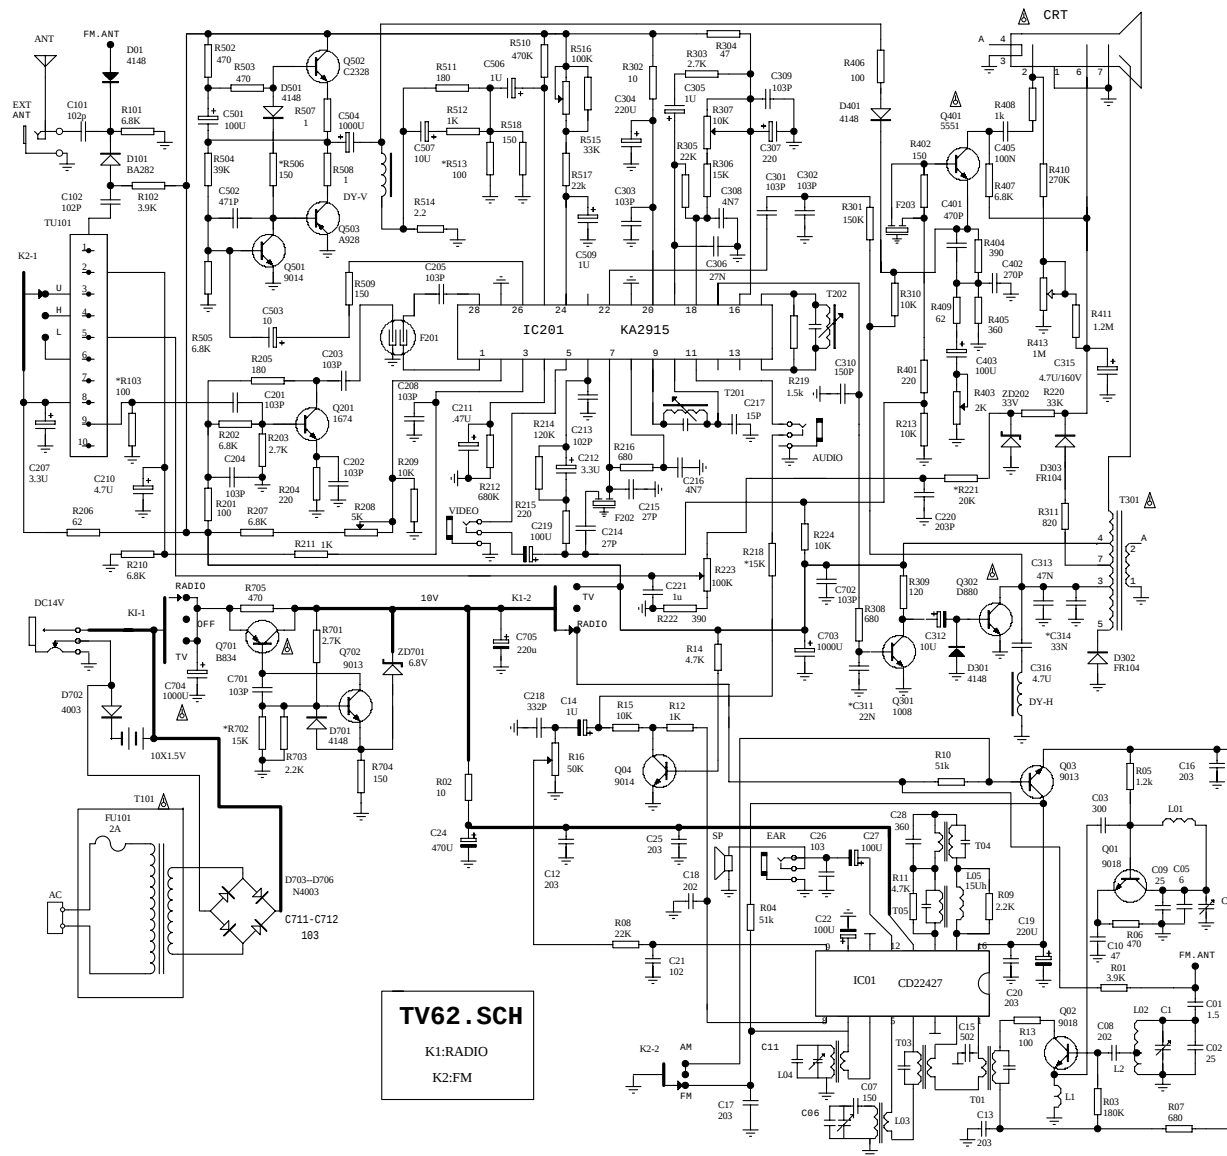

TV62.SCH

K1:RADIO

K2:FM

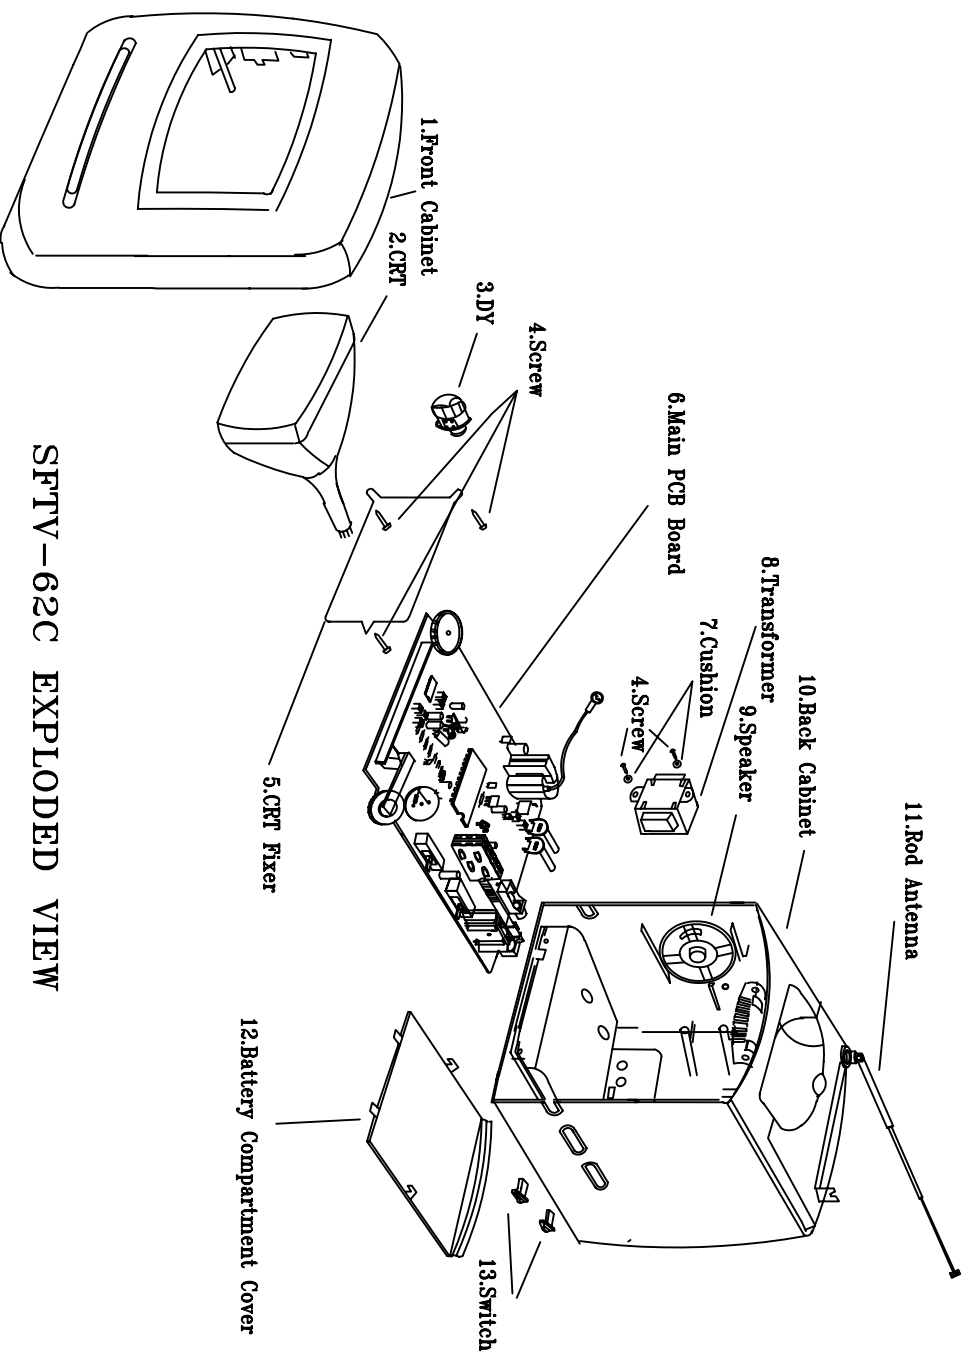

SFTV-62C EXPLODED VIEW