


Features

- Operating voltage: 4.0V to 5.5VDC
- Built-in 12MHz RC oscillstor
External 32.768kHz crystal or 12MHz frequency source input
- USB 1.1 and USB 2.0 compatible
- Low-voltage Reset at 3.75V
- Operating temperature from 0 oC to 70 oF
- HE2321U available in 24-pin SOIC,24-pin PDIP

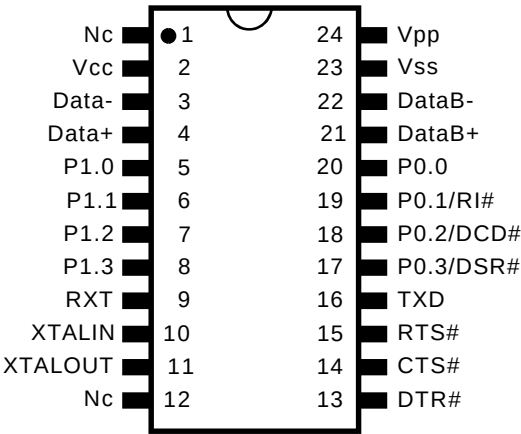

Ordering information

Ordering Code	Package Type
HE2321U-SC	24-Pin Small Outline Package
HE2321U-PC	24-Pin (300-Mil) PDIP