

TOSHIBA BIPOLAR DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TD62783AP, TD62783F, TD62783AF TD62784AP, TD62784F, TD62784AF

8CH HIGH-VOLTAGE SOURCE DRIVER

The TD62783AP/F/AF Series are comprised of eight source current Transistor Array.

These drivers are specifically designed for fluorescent display applications.

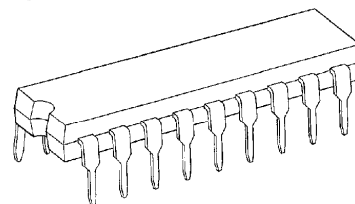
Applications include relay, hammer and lamp drivers.

FEATURES

- High output voltage Type-AP, AF : $V_{CC} = 50V$ MIN.
Type-F : $V_{CC} = 35V$ MIN.
- Output current (single output) $I_{OUT} = -500mA$ MIN.
- Output clamp diodes
- Single supply voltage
- Input compatible with various types of logic
- Package Type-AP : DIP-18pin
- Package Type-F, AF : SOP-18pin


TYPE	DESIGNATION
TD62783AP/F/AF	TTL, 5V CMOS
TD62784AP/F/AF	6~15V PMOS, CMOS

TD62783AP
TD62784AP



DIP18-P-300-2.54D

TD62783F
TD62783AF
TD62784F
TD62784AF




SOP18-P-375-1.27


Weight

DIP18-P-300-2.54D : 1.47g (Typ.)
SOP18-P-375-1.27 : 0.41g (Typ.)

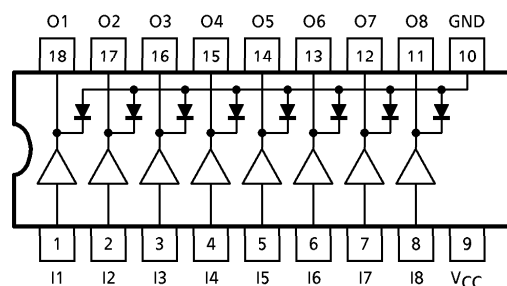PIN CONNECTION (TOP VIEW)



SCHEMATICS (EACH DRIVER)

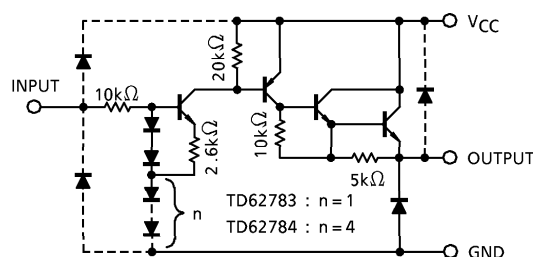

(Note) The input and output parasitic diodes cannot be used as clamp diodes.

961001EBA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage	AP, AF	V _{CC}	50	V
	F		35	
Output Current		I _{OUT}	– 500	mA / ch
Input Voltage		V _{IN} (Note 1)	15	V
		V _{IN} (Note 2)	30	
Clamp Diode Reverse Voltage	AP, AF	V _R	50	V
	F		35	
Clamp Diode Forward Current		I _F	500	mA
Power Dissipation	AP	P _D (Note 3)	1.47	W
	F, AF		0.96	
Operating Temperature		T _{opr}	– 40~85	°C
Storage Temperature		T _{stg}	– 55~150	°C

(Note 1) Only TD62783AP / F / AF

(Note 2) Only TD62784AP / F / AF









(Note 3) Delated above 25°C in the proportion of 11.7W/°C (AP Type), 7.7W/°C (F, AF Type).

RECOMMENDED OPERATING CONDITIONS (Ta = – 40~85°C)

CHARACTERISTIC			SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Supply Voltage		AP, AF	V _{CC}	—		—	—	50	V
		F		—		—	—	35	
Output Current			I _{OUT}	Ta = 85°C T _j = 120°C T _{pw} = 25ms	Duty = 10% 8 Circuits	—	—	– 260	mA / ch
					Duty = 50% 8 Circuits	—	—	– 59	
					Duty = 10% 8 Circuits	—	—	– 180	
					AF, F	Duty = 50% 8 Circuits	—	—	
Input Voltage		TD62783AP / F / AF	V _{IN}	—		—	—	12	V
		TD62784AP / F / AF		—		—	—	24	
Input Voltage	Output On	TD62783AP / F / AF	V _{IN} (ON)	—		2.0	5.0	15	V
		TD62784AP / F / AF		—		4.5	12.0	30	
	Output Off	TD62783AP / F / AF	V _{IN} (OFF)	—		0	—	0.8	
		TD62784AP / F / AF		—		0	—	2.0	
Clamp Diode Reverse Voltage		AP	V _R	—		—	—	50	V
		F, AF		—		—	—	35	
Clamp Diode Forward Current			I _F	—		—	—	400	mA
Power Dissipation		AP	P _D	—		—	—	0.52	W
		F, AF		—		—	—	0.35	

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Leakage Current		I _{CEX}	1	V _{CC} = V _{CC} MAX. V _{IN} = 0.4V Ta = 25°C	—	—	100	μA
Output Saturation Voltage		V _{CE (sat)}	2	V _{IN} = V _{IN (ON)} , I _{OUT} = - 350mA	—	—	2.0	V
				V _{IN} = V _{IN (ON)} , I _{OUT} = - 225mA	—	—	1.9	
				V _{IN} = V _{IN (ON)} , I _{OUT} = - 100mA	—	—	1.8	
Input Current	TD62783AP / F / AF	I _{IN (ON)}	3	V _{IN} = 2.4V	—	36	52	μA
	TD62784AP / F / AF			V _{IN} = 3.85V	—	180	260	
				V _{IN} = 5V	—	92	130	
				V _{IN} = 12V	—	790	1130	
Input Voltage	TD62783AP / F / AF	V _{IN (ON)}	4	V _{CE} = 2.0V	—	—	2.0	V
	TD62784AP / F / AF			I _{OUT} = - 350mA	—	—	4.5	
	TD62783AP / F / AF	V _{IN (OFF)}		I _{OUT} = - 500μA	0.8	—	—	
	TD62784AP / F / AF				2.0	—	—	
Supply Current		I _{CC (ON)}	3	V _{IN} = V _{IN (ON)} , V _{CC} = 50V	—	—	2.5	mA / ch
Clamp Diode Reverse Current	AP, AF	I _R	5	V _R = 50V	—	—	50	μA
	F			V _R = 35V	—	—	50	
Clamp Diode Forward Voltage		V _F	6	I _F = 350mA	—	—	2.0	V
Turn-On Delay		t _{ON}	7	V _{CC} = V _{CC} MAX. R _L = 125Ω C _L = 15pF, R _L = 88Ω (F)	—	0.15	—	μs
Turn-Off Delay		t _{OFF}			—	1.8	—	





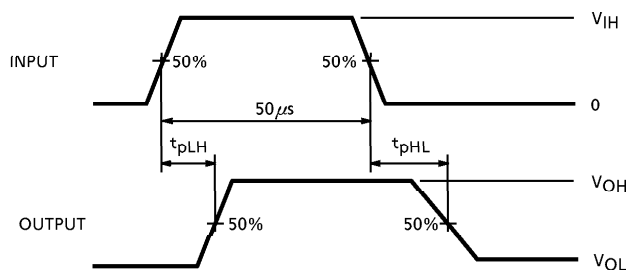
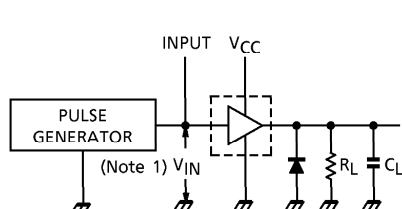
TEST CIRCUIT
1. I_{CEX}

2. $V_{CE(sat)}$

3. $I_{IN(ON)}$, I_{CC}

4. $V_{IN(ON)}$, $V_{IN(OFF)}$

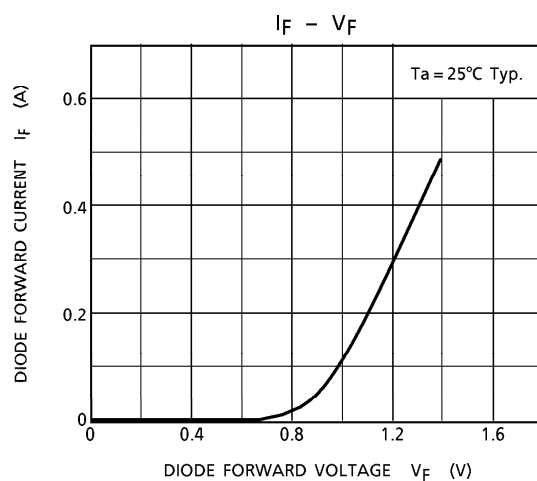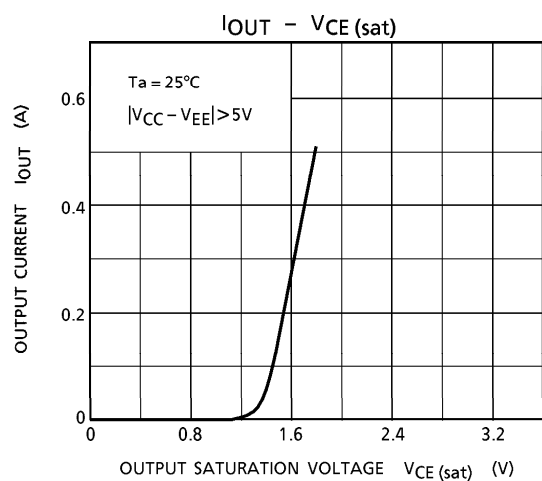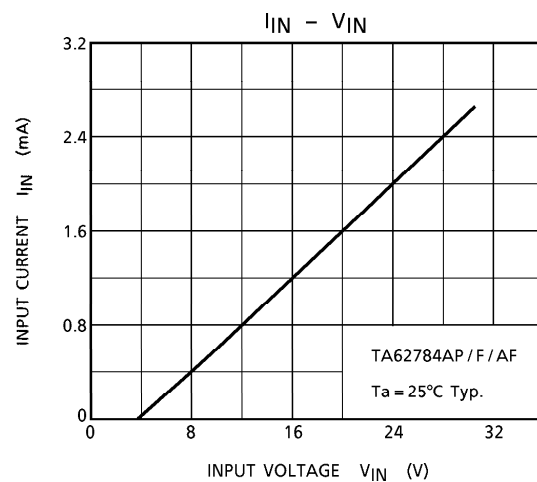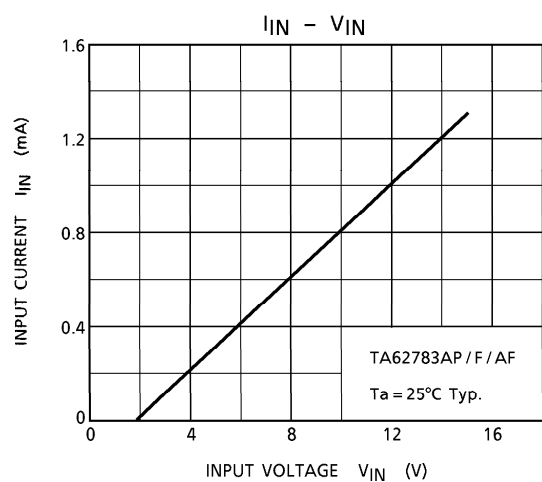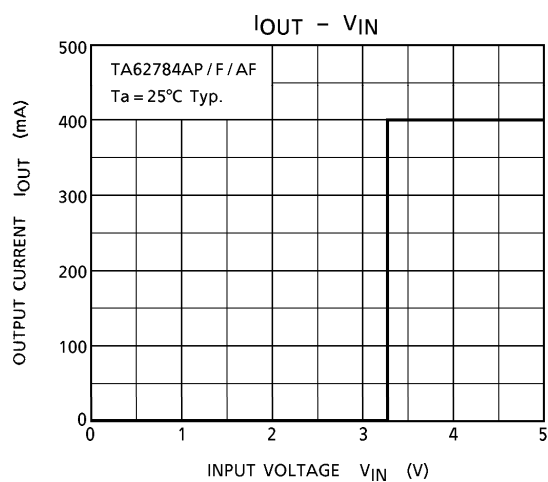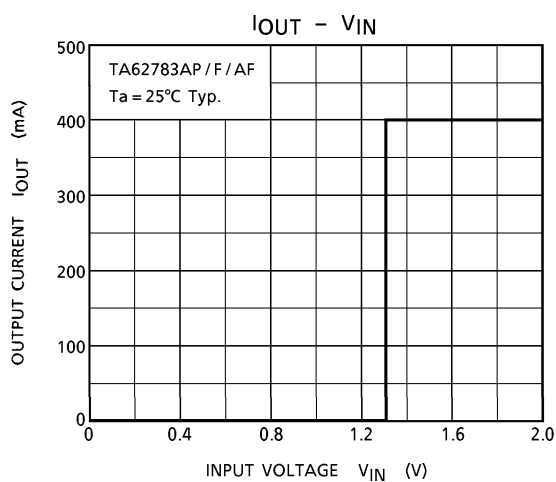5. I_R

6. V_F

7. t_{ON} , t_{OFF}


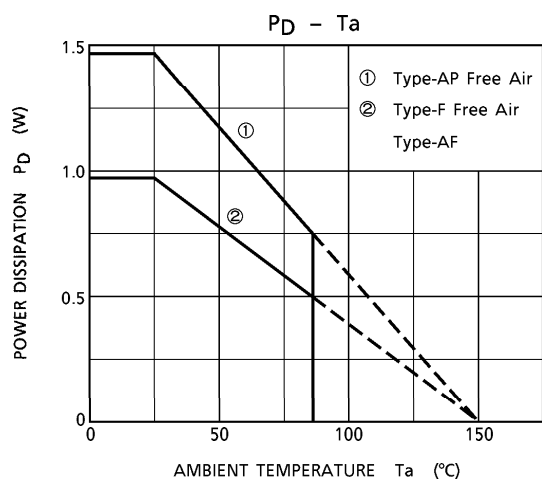
(Note 1) Pulse width $50\mu s$, duty cycle 10%
Output impedance 50Ω , $t_r \leq 5ns$, $t_f \leq 10ns$

(Note 2) C_L includes probe and jig capacitance

PRECAUTIONS for USING

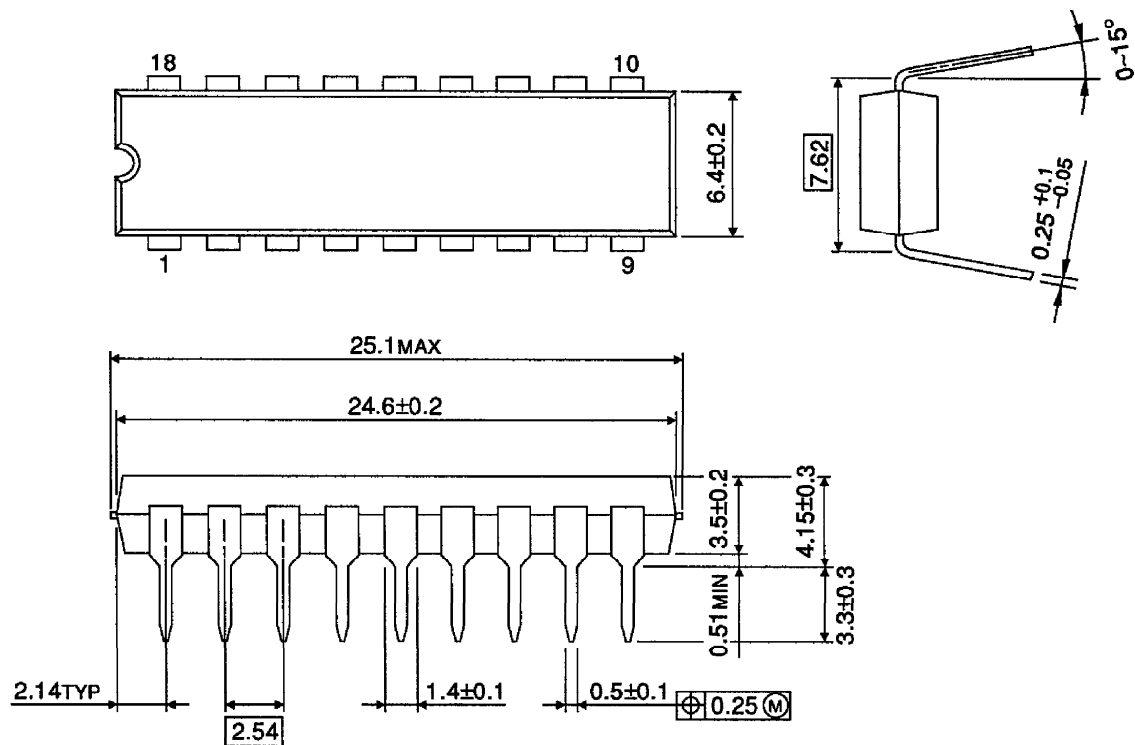
Utmost care is necessary in the design of the output line, V_{CC} and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.





OUTLINE DRAWING
DIP18-P-300-2.54D





Unit : mm



Weight : 1.47g (Typ.)

OUTLINE DRAWING
SOP18-P-375-1.27

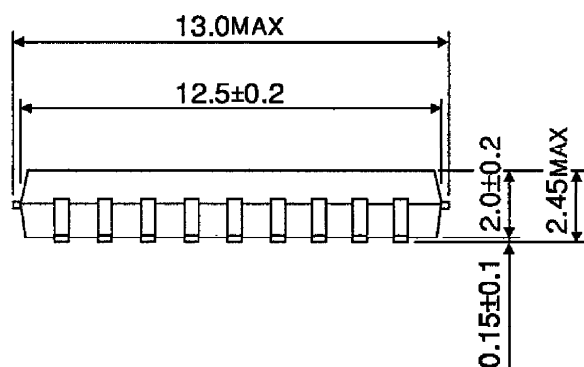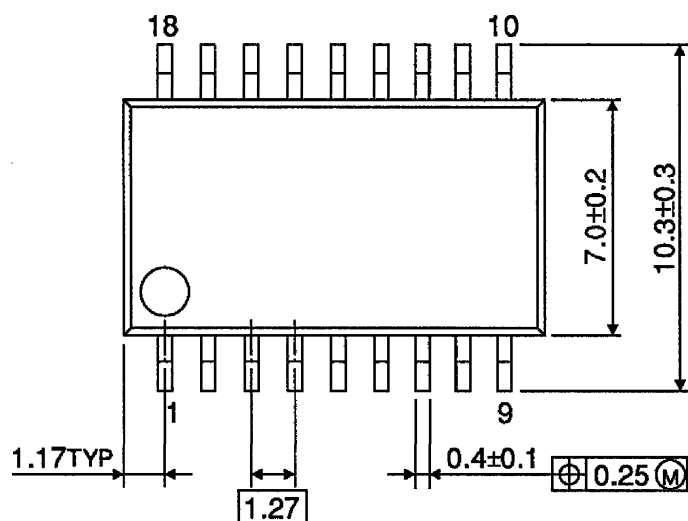Unit : mm



Weight : 0.41g (Typ.)