


5V/1A Input

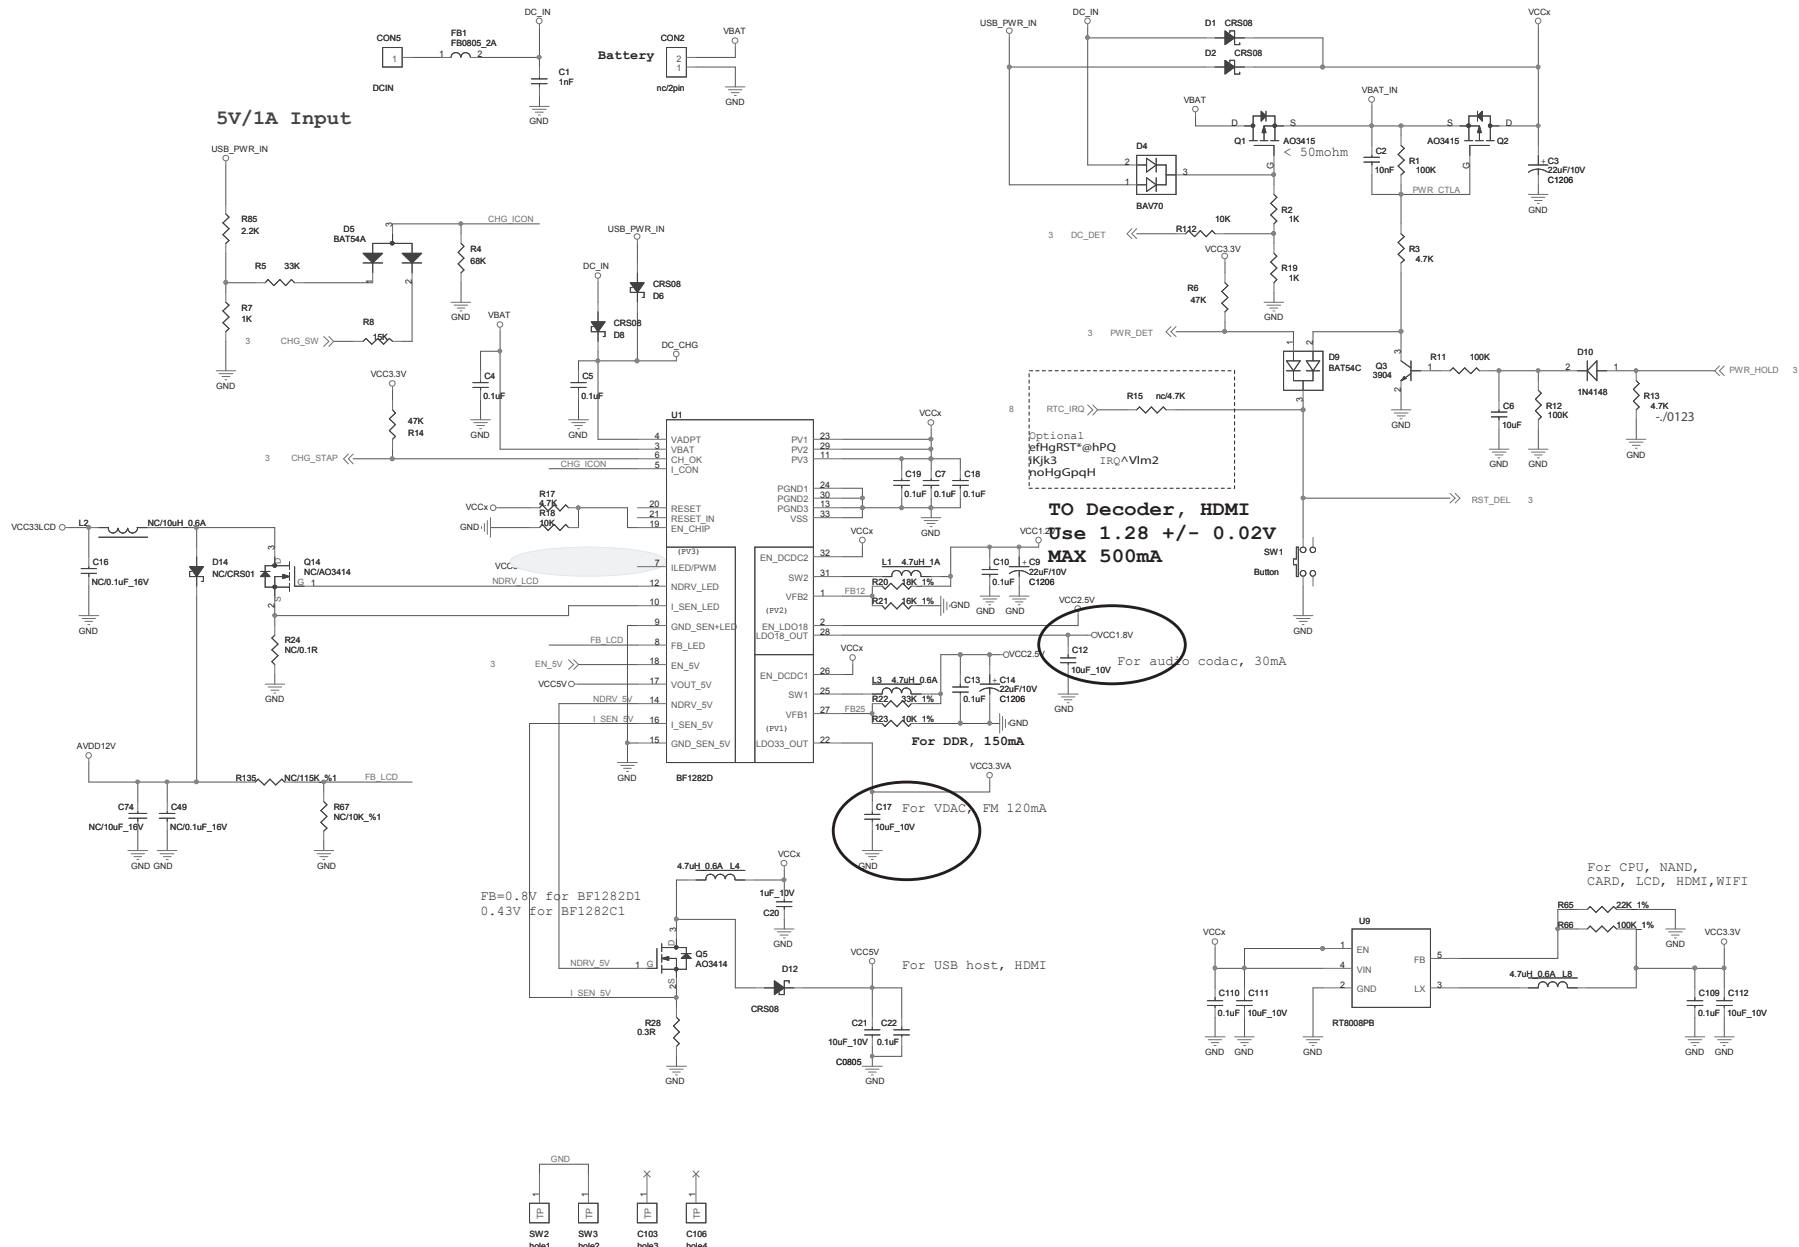

To Decoder, HDMI
Use 1.28 +/- 0.02V
MAX 500mA


For audio codac, 30mA


For DDR, 150mA






For VDAC, EM 120mA

For USB host, HDMI

For CPU, NAND,
CARD, LCD, HDMI, WIFI

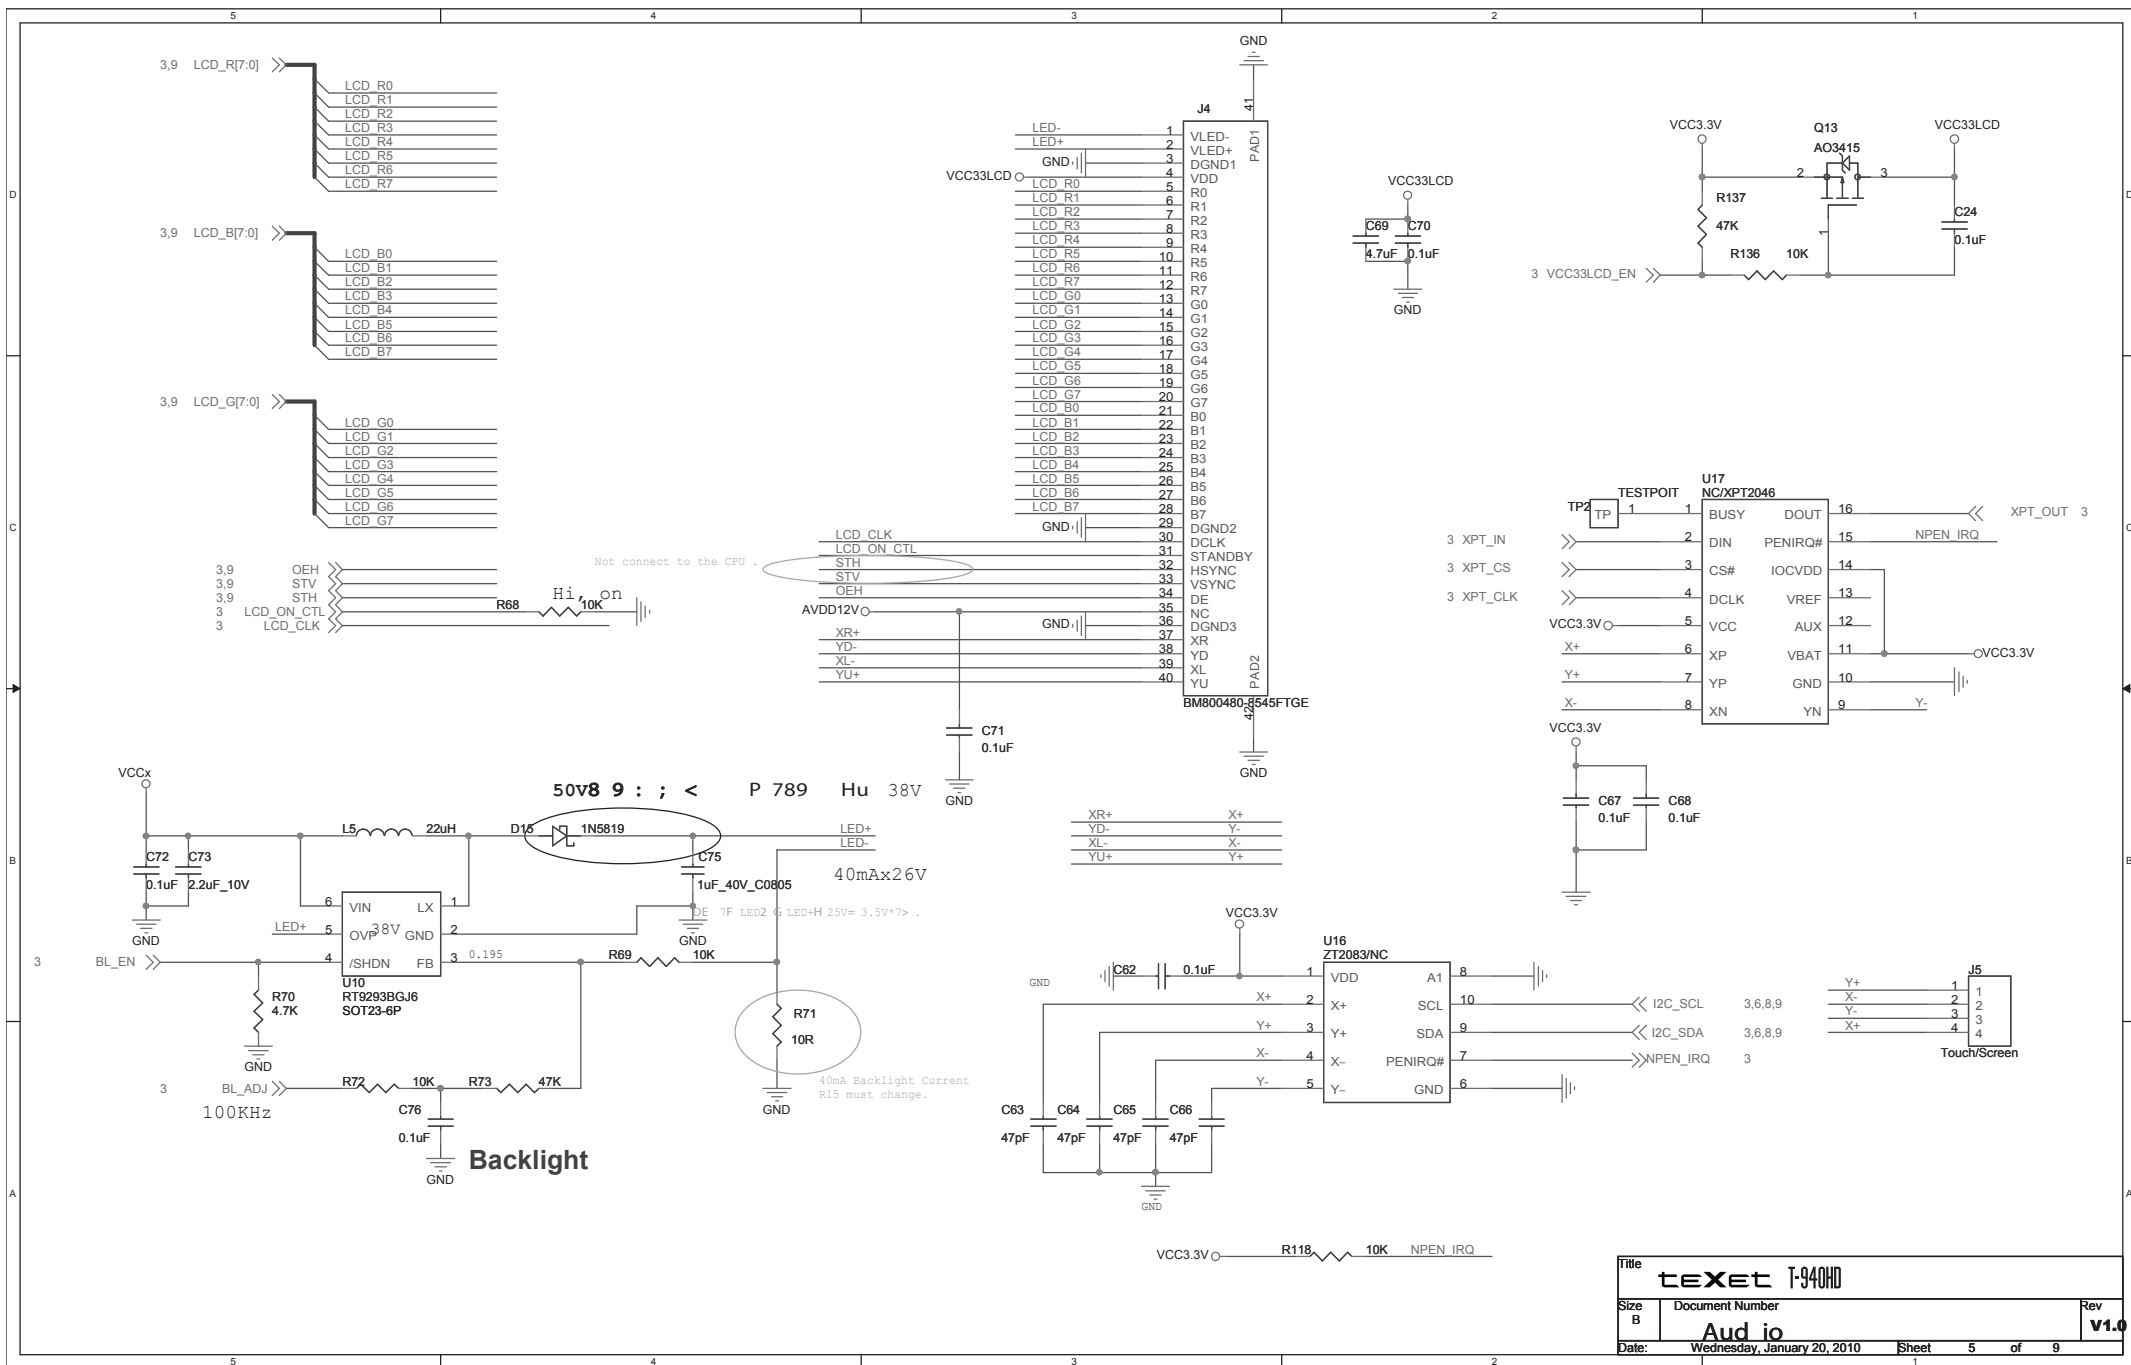

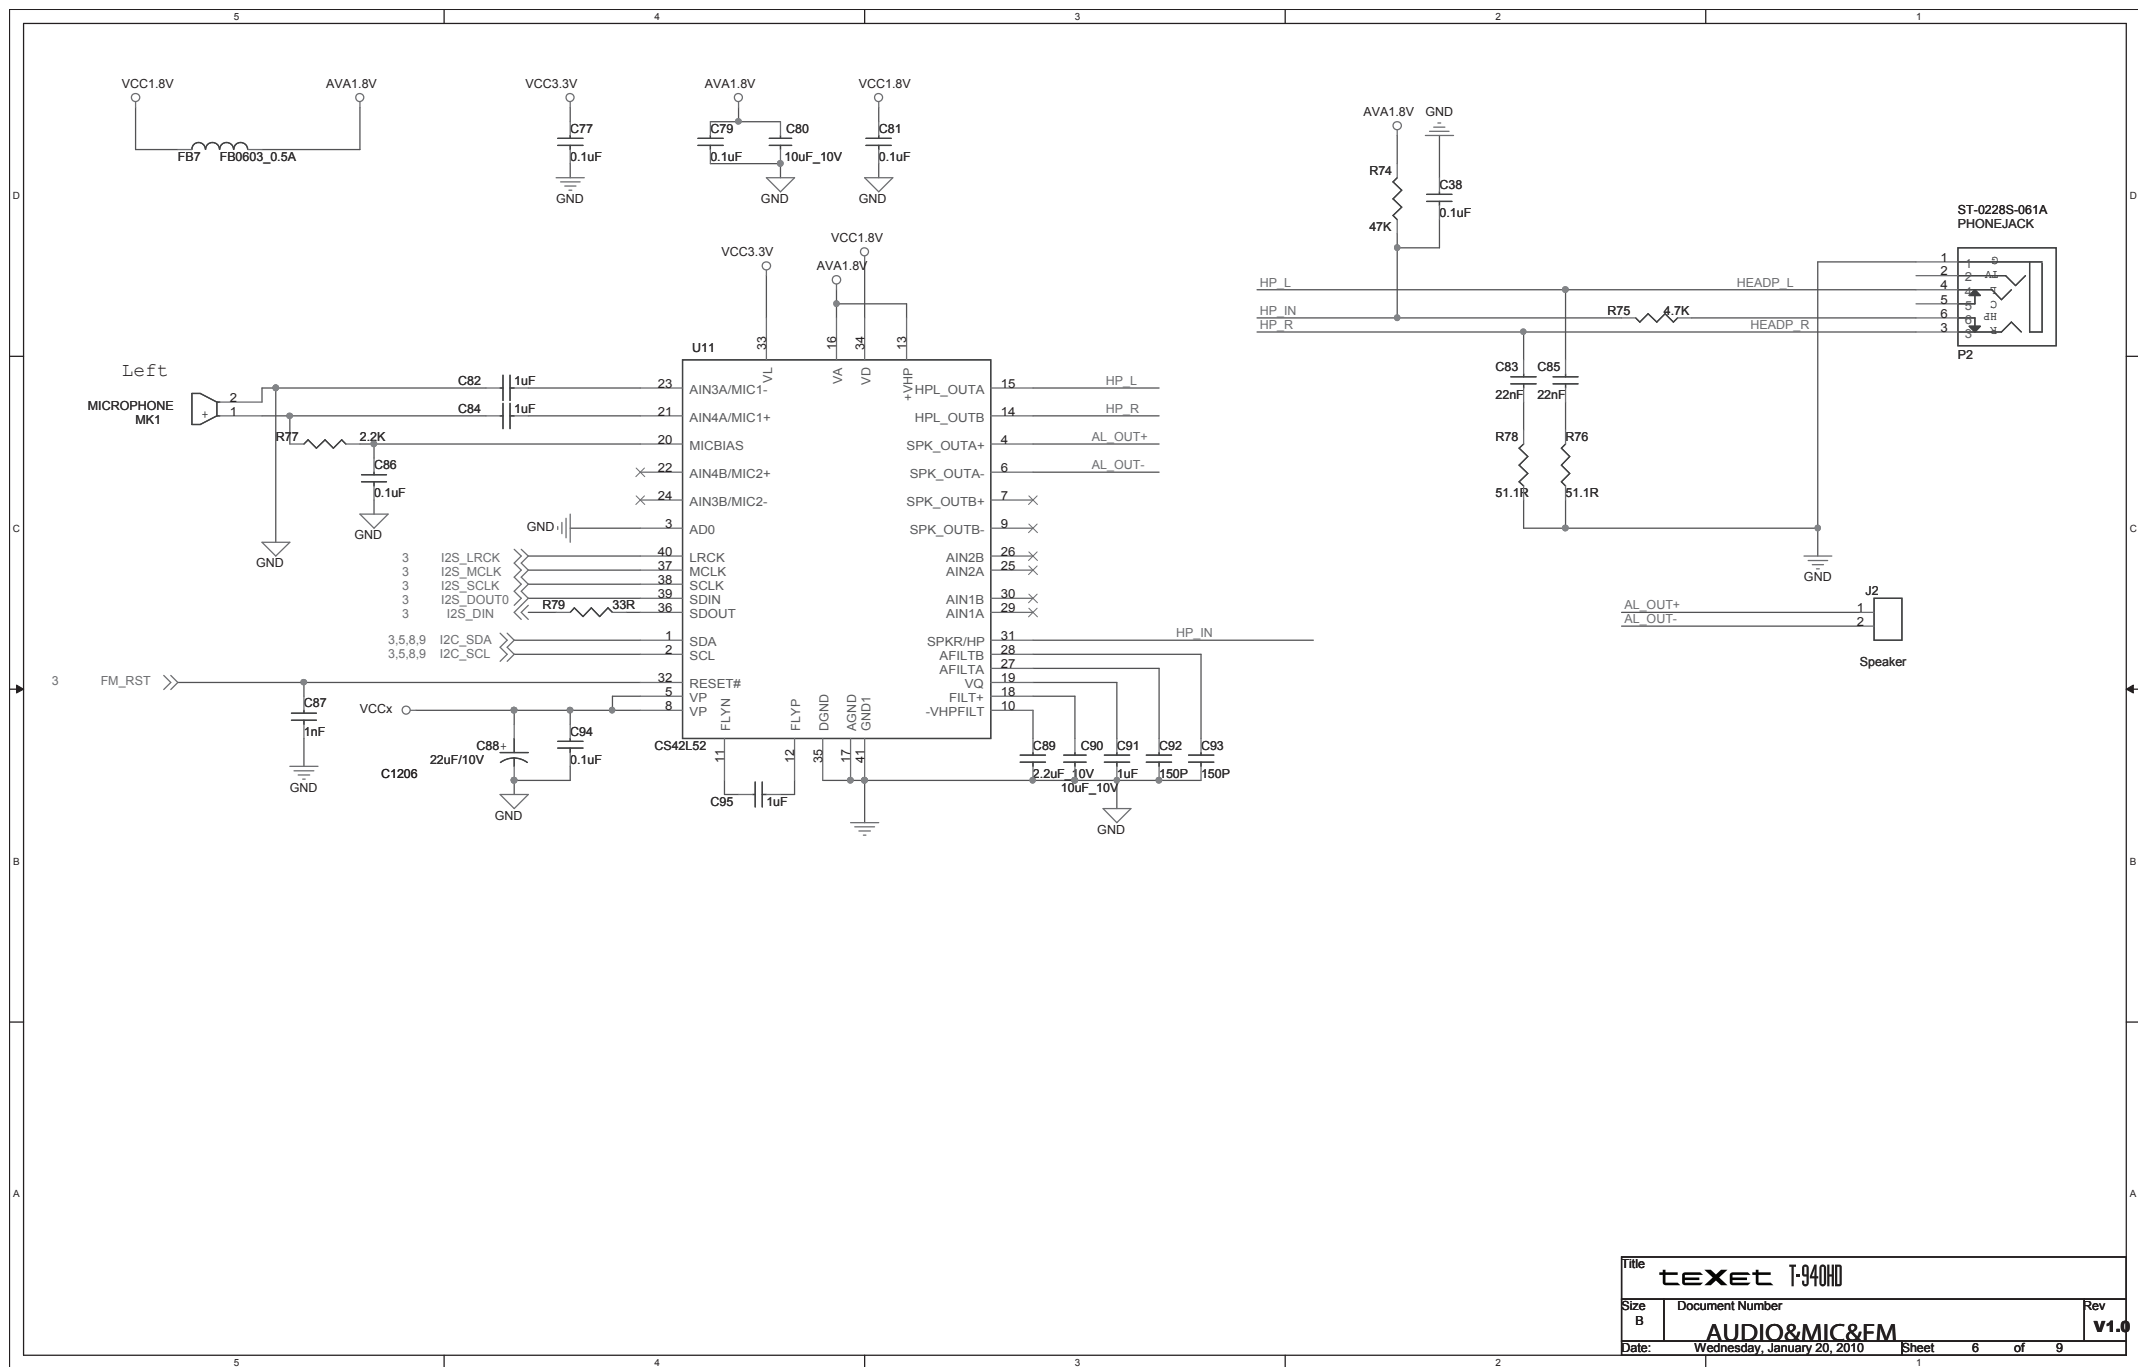

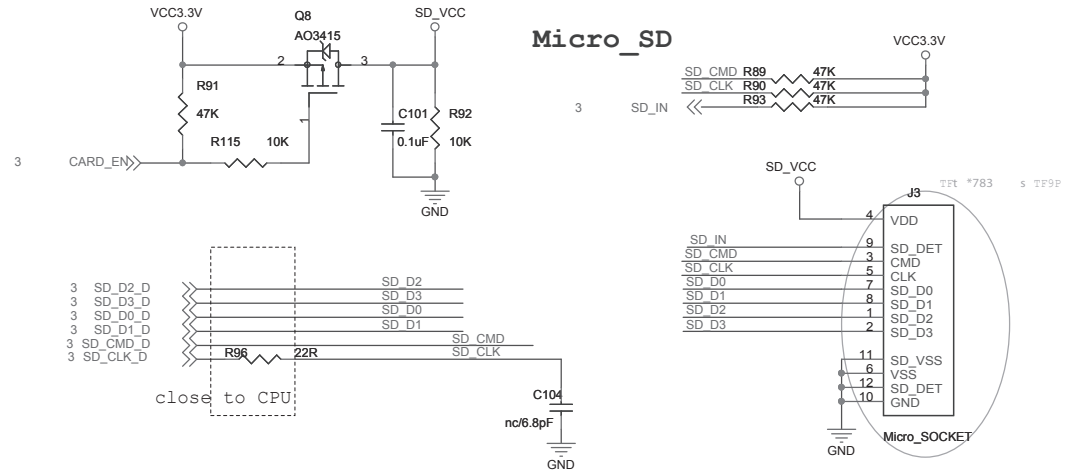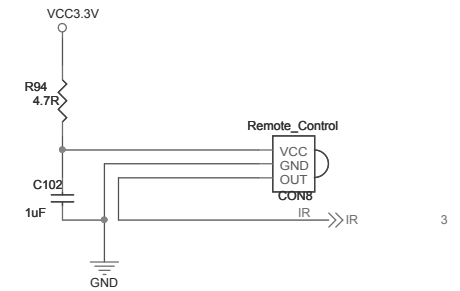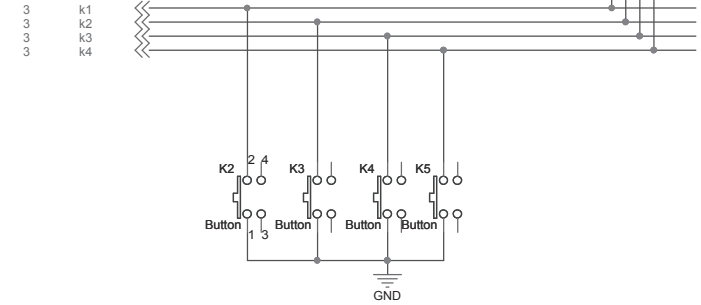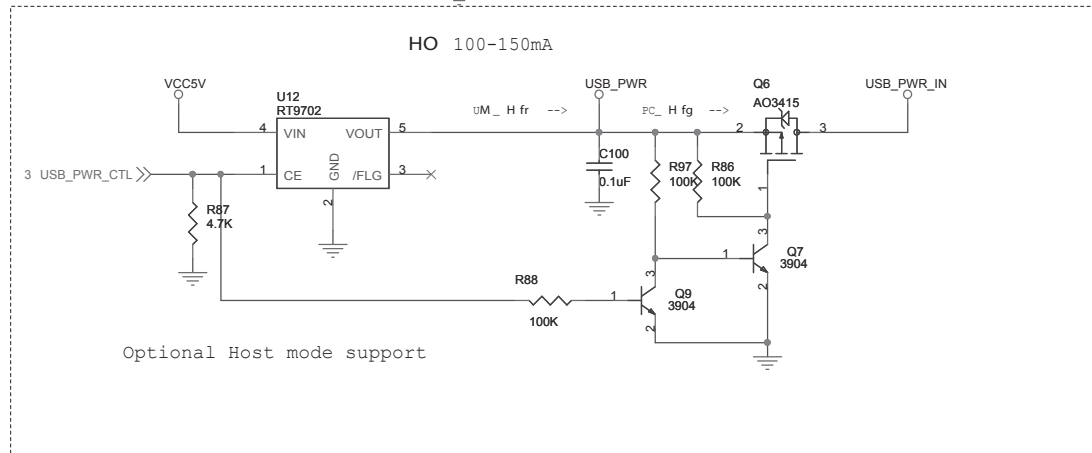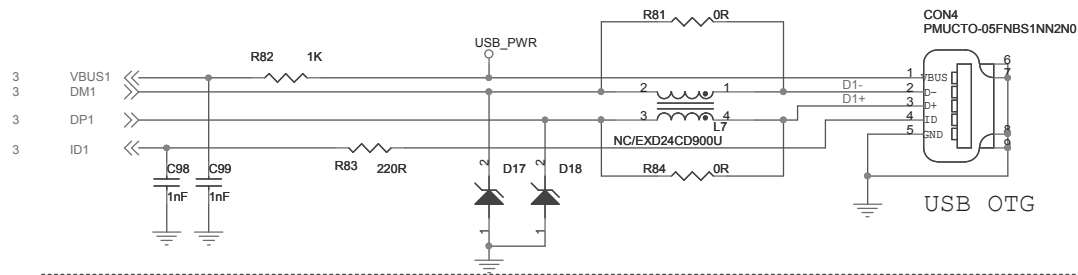

please pay attention to the pin arrange of mini sd socket

