


3.2 SCHEMATIC DIAGRAM

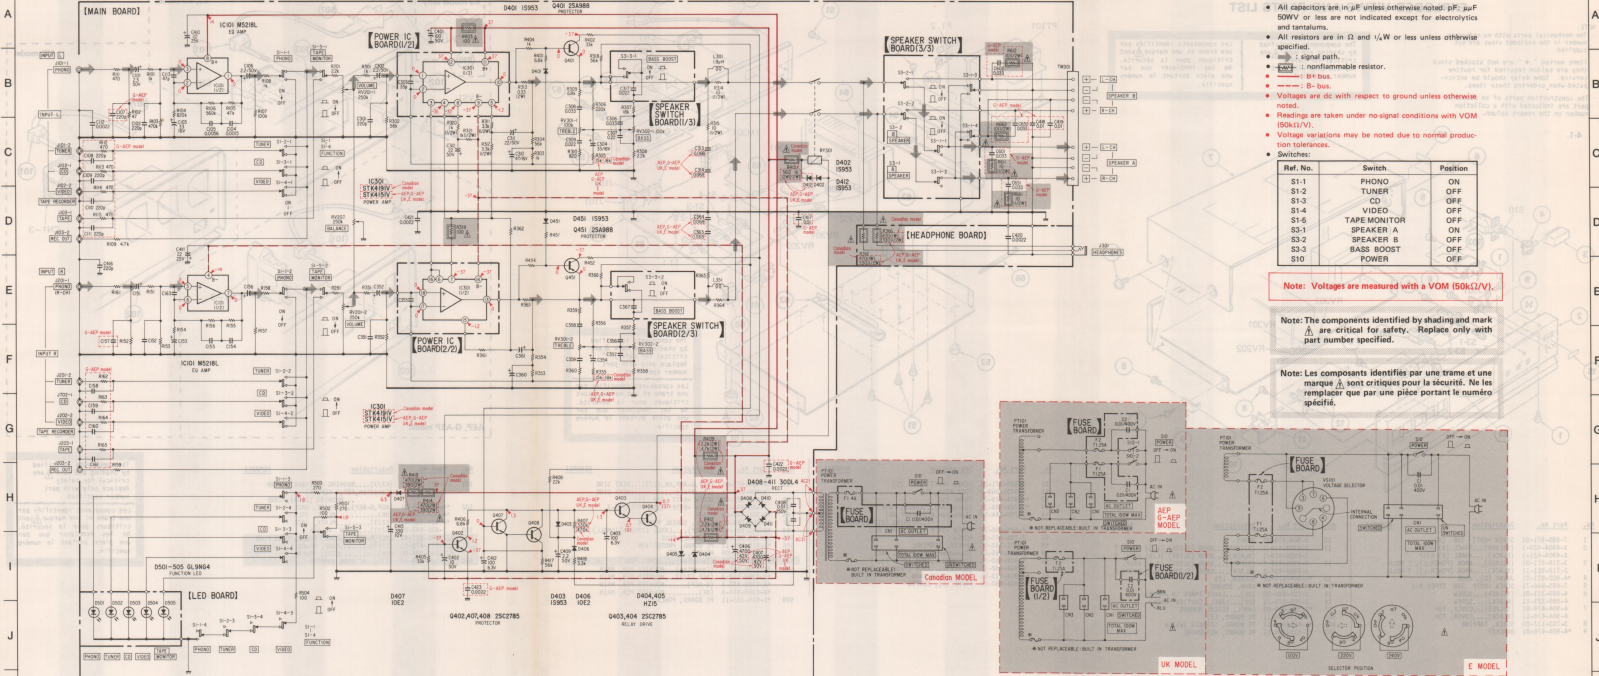

- Notes:**
- All capacitors are in μF unless otherwise noted. pF, μF , 50WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in Ω and μW or less unless otherwise specified.
 - : signal path.
 - : nonflammable resistor.
 - : 5W box.
 - : B-box.
- Voltages are dc with respect to ground unless otherwise noted.**
- Readings are taken under no-signal conditions with VOM (50k Ω /V).**
- Voltage variations may be noted due to normal production tolerances.**
- Switches:**
- | Ref. No. | Switch | Position |
|----------|--------------|----------|
| S1-1 | PHONE | ON |
| S1-2 | TUNER | OFF |
| S1-3 | CD | OFF |
| S1-4 | VIDEO | OFF |
| S1-5 | TAPE MONITOR | OFF |
| S3-1 | SPEAKER A | ON |
| S3-2 | SPEAKER B | OFF |
| S3-3 | BASS BOOST | OFF |
| S10 | POWER | OFF |

Note: Voltages are measured with a VOM (50k Ω /V).

Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par une trame et une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

