

SPECIFICATION FORM**FEATURES**

- ✧ 2.30 INCHES (56.80MM) DIGIT HEIGHT
- ✧ 47.80MM×69.70MM OUTLINE
- ✧ SINGLE DIGIT
- ✧ MONO COLOR
- ✧ EASY ASSEMBLY
- ✧ HIGH BRIGHTNESS
- ✧ SOLID STATE RELIABILITY




DESCRIPTION

The REC-S23101AG(C) is a 2.3 inches (56.80mm) digit height, 47.80mm×69.70mm outline, single color, single digit numeric display. This display utilizes yellow-green LED chips fabricated from GaP epiwafer on GaP substrate grown by liquid phase epitaxy. These devices have black face and white segments.




DEVICE

PART NO.	EMITTING COLOR	DESCRIPTION
REC-S23101AG(C)	Yellow-Green	Black Face & White Segments

PACKAGE DIMENSION

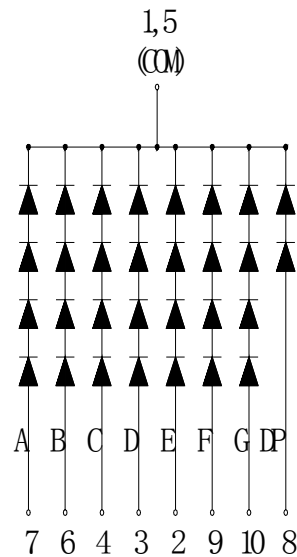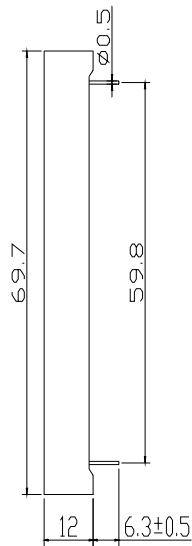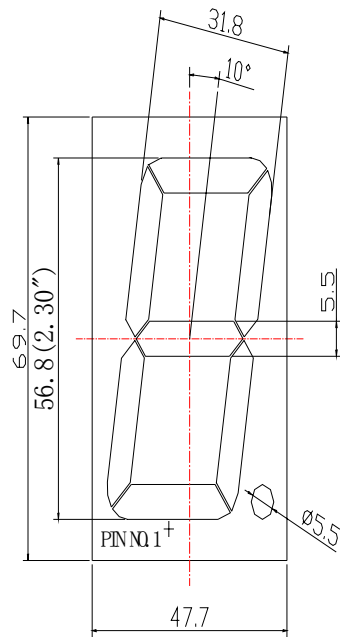

- 1. COMMON CATHODE
- 2. ANODE E
- 3. ANODE D
- 4. ANODE C
- 5. COMMON CATHODE
- 6. ANODE B
- 7. ANODE A
- 8. ANODE DP
- 9. ANODE F
- 10. ANODE G

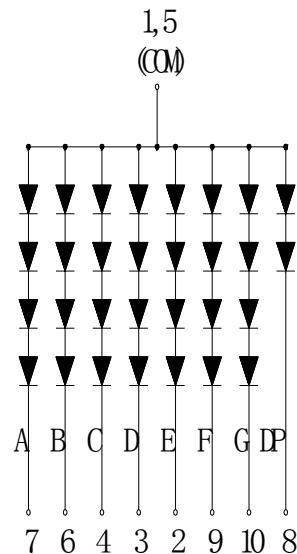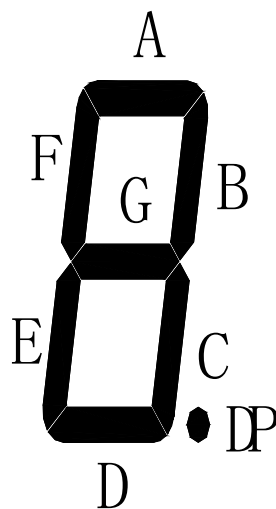

- 1. COMMON ANODE
- 2. CATHODE E
- 3. CATHODE D
- 4. CATHODE C
- 5. COMMON ANODE
- 6. CATHODE B
- 7. CATHODE A
- 8. CATHODE DP
- 9. CATHODE F
- 10. CATHODE G

ABSOLUTE MAXIMUM RATING AT $T_A=25^{\circ}\text{C}$

PARAMETER	SYMBOL	MAXIMUM	UNIT
Power Dissipation per Seg.	P _{AD}	300	mW
Peak Forward Current per Seg.	I _{PF}	80	mA
Continuous Forward Current per Seg.	I _{AF}	20	mA
Reverse Voltage per Seg.	V _R	5	V
Operating Temperature Range, T _{opr}	- 25°C to + 60°C		
Storage Temperature Range, T _{stg}	- 30°C to + 85°C		
Solder Temperature : 1 / 16 inch below seating plane for 3 seconds at 260°C			

ELECTRO - OPTICAL CHARACTERISTICS AT $T_A=25^{\circ}\text{C}$

PARAMETER	UNIT	MIN	TYPE	MAX
Luminous Intensity per Seg., I_V ($I_F=20\text{mA}$)	mcd	10	13	17
Peak Emission Wavelength, λ_p ($I_F=20\text{mA}$)	nm		572	
Special Line Half-Width, $\Delta\lambda$ ($I_F=20\text{mA}$)	nm		30	
Forward Voltage per Seg., V_F ($I_F=20\text{mA}$)	V	1.7	2.15	2.5
Reverse Current per Seg., I_R , ($V_R=5\text{V}$)	μA			100
Luminous Intensity Matching Ratio, I_{V-m} ($I_F=20\text{mA}$)				2:1