


10.7M Series of Discriminator for FM

Dimension

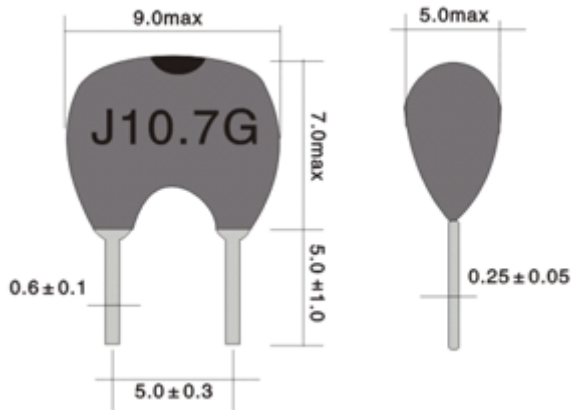

Principal Parameters

Part Number	Demodulation Output at fo (mv) min	Demodulation Factor at fo (%) max	Demodulation 3dB Band Width (KHz)(min) 3dB	Applicable IC
JT10.7MG1	25	1.0	345	CX-2009,CX-20111
JT10.7MG3	650	1.0	±150	TA7303P,TA7130, μPC1028H,LA1150
JT10.7MG16	60-90	0.9	300	TA8122AN
JT10.7MG18	60-90	0.9	300	TA8132N
JT10.7MG33	45	0.7	250	TA2007
JT10.7MG80	65	1.0	300	TA2104AFN
JT10.7MG82	90	0.8	320	TA2099N
JT10.7MG92	60	1.0	300	TA2132P
JT10.7MC1	35	1.0	242	CXA1019M,CX-20091
JT10.7MC40	40	0.7	130	TEA5710

Standard Rule

Steps	D	B	A	C	E
Color	Black	Blue	Red	Orange	White
Center Frequency (MHz)	10.64 ±0.03	10.67 ±0.03	10.70 ±0.03	10.73 ±0.03	10.76 ±0.03

Wuhan Sunncom Technology Co.,LTD

www.sunncom.cn

sunncom@sunncom.cn

Tel:+86 27 88840916

Fax:+86 27 88924696