
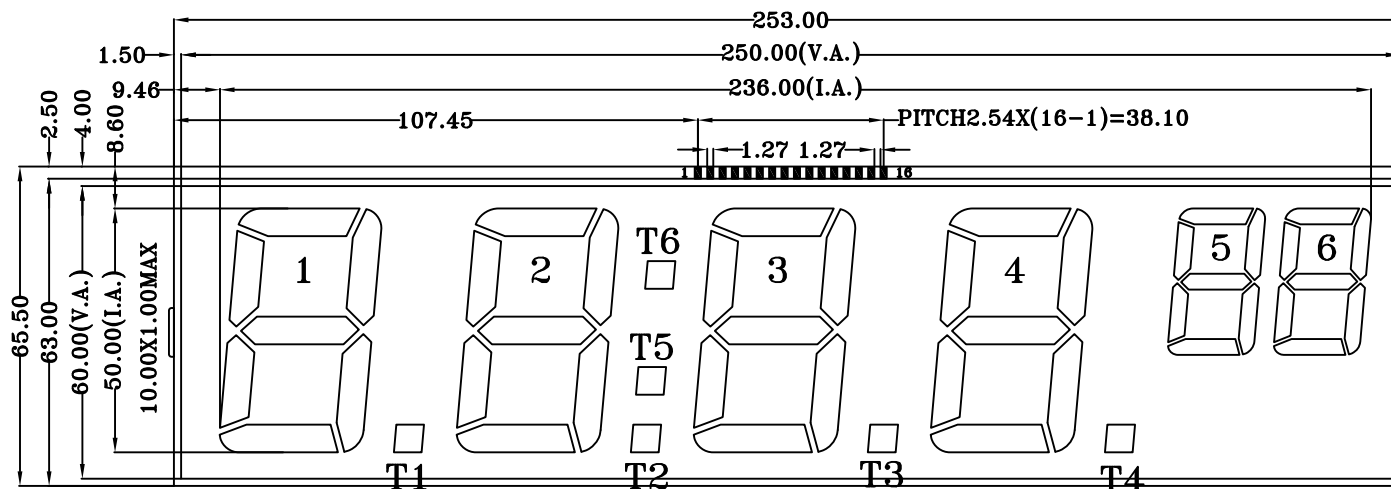



PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM1	1D	T1	2D	T2	3D	T3	4D	T4	5D	T5	6D	T6				COM1
COM2	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C			COM2	
COM3	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B		COM3		
COM4	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	COM4			

NOTE

- 1 TOLERANCE UNLESS OTHERWISE SPECIFIED: ± 0.2
- 2 ALL DIMENSIONS ARE IN mm
- 3 VIEWING ANGLE: 6 O'CLOCK
- 4 POLARIZER: TRANSFLECTIVE, POSITIVE
- 5 MULTIPLEX LEVEL: 1/4 DUTY, 1/3 BIAS
- 6 LCD DRIVING VOLTAGE (V_{op}): 3.0V
- 7 OPERATING TEMP: -20°C TO 70°C
STORAGE TEMP: -30°C TO 80°C
- 8 DISPLAY TYPE: TN
- 9 CONNECTOR: PIN
- 10 GLASS THICKNESS: FRONT -- 1.1
BACK -- 1.1
- 11 MATERIAL CONFORM TO THE RoSH STANDARD

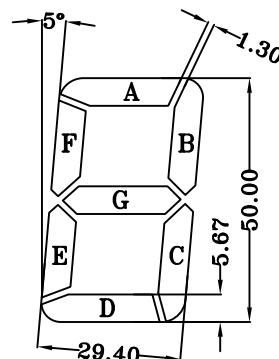

Eff.Data	Rev.	Change Description
2012-04-09	A	new
2012-04-09	B	change the dimension

DESIGN MODEL		GDC1156	
REV.	B	DATE	2012.04.09
CUSTOMER MODEL		APPROVED BY	SY ZHAO
		CHECKED BY	ZL HE
PAGE	1/1	DRAWN BY	LJ WANG