

4MR60-4

Professional Midrange Driver



KEY FEATURES

- 0.78" Voice coil
- 30 Watts continuous power handling
- 90 dB Sensitivity
- 90-15,000 Hz
- Fiber Glass cone and rubber surround

GENERAL SPECIFICATIONS



Nominal Diameter	4" (101.6 mm)
Nominal impedance	4 ohms
Rated Power Handling	30 Watts
Program Power	60 Watts
Sensitivity 2.00V at 1m	90 dB
Recommended Hi Pass Crossover*	190 Hz*
*For Full Power Handling	*12db Per Octave Crossover
Frequency Response at -10dB	90- 15,000 Hz
Voice Coil Diameter	0.78" (20 mm)
Voice Coil Wire	CCAW
Former Material	Kapton®
Frame Material	Stamped Steel

THIELE-SMALL PARAMETERS


Equivalent Volume	Vas	3.26 l
Excursion	Xmax	2.0 mm
Free Air Resonance	Fs	89.88 Hz
Mechanical Factor	Qms	7.34
Electrical Factor	Qes	0.75
Total Factor	Qts	0.68
Cone Area	Sd	57cm ²
Mechanical Mass	Mms	4.32 g
Bl Factor	BL	3.42 Tm
Dc Resistance	Re	3.6 Ohms
Inductance	Le	0.20 mH at 1 kHz
Mechanical Mass Without Air	Mmd	4.07 g
Mechanical Compliance	Cms	0.725 mm/N

EXTRA INFO

Overall Diameter	4.96" (126 mm)
Front Mount Baffle Cutout	4.02" (102 mm)
Mounting Depth	2.20" (56 mm)
Overall Depth	2.36" (60 mm)
Net Weight	1.15 Lbs (0.52 kg)
Shipping Weight	1.24 Lbs (0.56 kg)
Carton Dimensions W x L x H	4.68" x 4.68" x 3.15" (119 x 119 x 80mm)

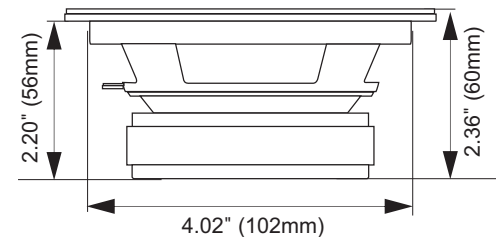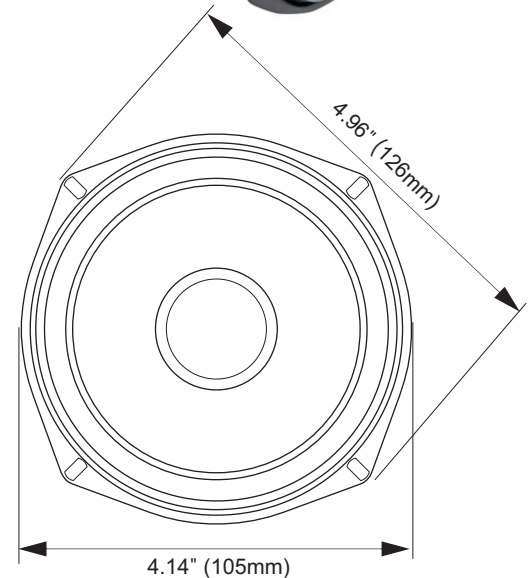

Frequency Response Measured at 2.00v/1m

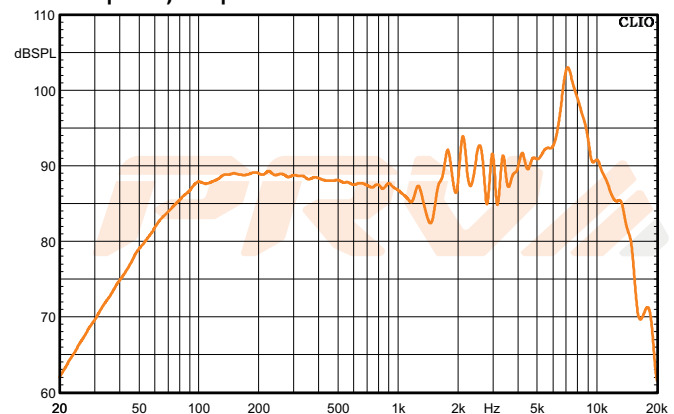

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
FORT LAUDERDALE, FL SAO LEOPOLDO, RS
support@prvaudio.com vendas@pvaudio.com.br
www.prvaudio.com www.pvaudio.com.br