


FANTIME V1.0



Designator	Quantity	Value	Type	All
C1, C2, C4	3	100n	K10-19	K10-19 0.1UFX25VY5V,+/ 80-20%
C3	1	0.47uF	K73-17	K73-17 0.47 uF 630 V 10%
C6	1	470uF	K50-35	K50-35 470uF 16V 105°C 20%, 8x12mm P:3.5mm
C7	1	10n	K73-17	K73-17 0.01uF 630V 10%
DD1	1	PIC12F629-I/P	PIC12F629-I/P	PIC12F629-I/P (MCHP)
R1	1	220	MLT-0.125	MLT-0.125 220 5% 0.125W
R2	1	1k	MLT-0.125	MLT-0.125 1k 5% 0.125W
R3, R5, R9, R11	4	10k	MLT-0.125	MLT-0.125 10k 5% 0.125W
R6	1	200	MLT-1	MLT-1 200 5% 1W
R7	1	39	MLT-0.5	MLT-0.5 39 5% 0.5W
R8	1	47k	3296W	3296W 47k
R10	1	910k	MLT-0.5	MLT-0.5 910k 5% 0.5W
R12	1	18k*/NC	MLT-0.125	MLT-0.125 18k* 5% 0.125W
VD1	1	L-934	L-934	LED L-934
VD2, VD3	2	1N4004	1N4004	1N4004
VD4	1	1N4734	1N4734	1N4734
VS1	1	UT131-6	UT131-6	UT131-6
X1, X2	2	KLS2-126-5.00-02P-4S	KLS2-126-5.00-02P-4S	KLS2-126-5.00-02P- 4S
XP1, XP2	2	PLS-2 + DS1027-2ABF10	PLS-2 + DS1027-2ABF10	PLS-2 + DS1027- 2ABF10

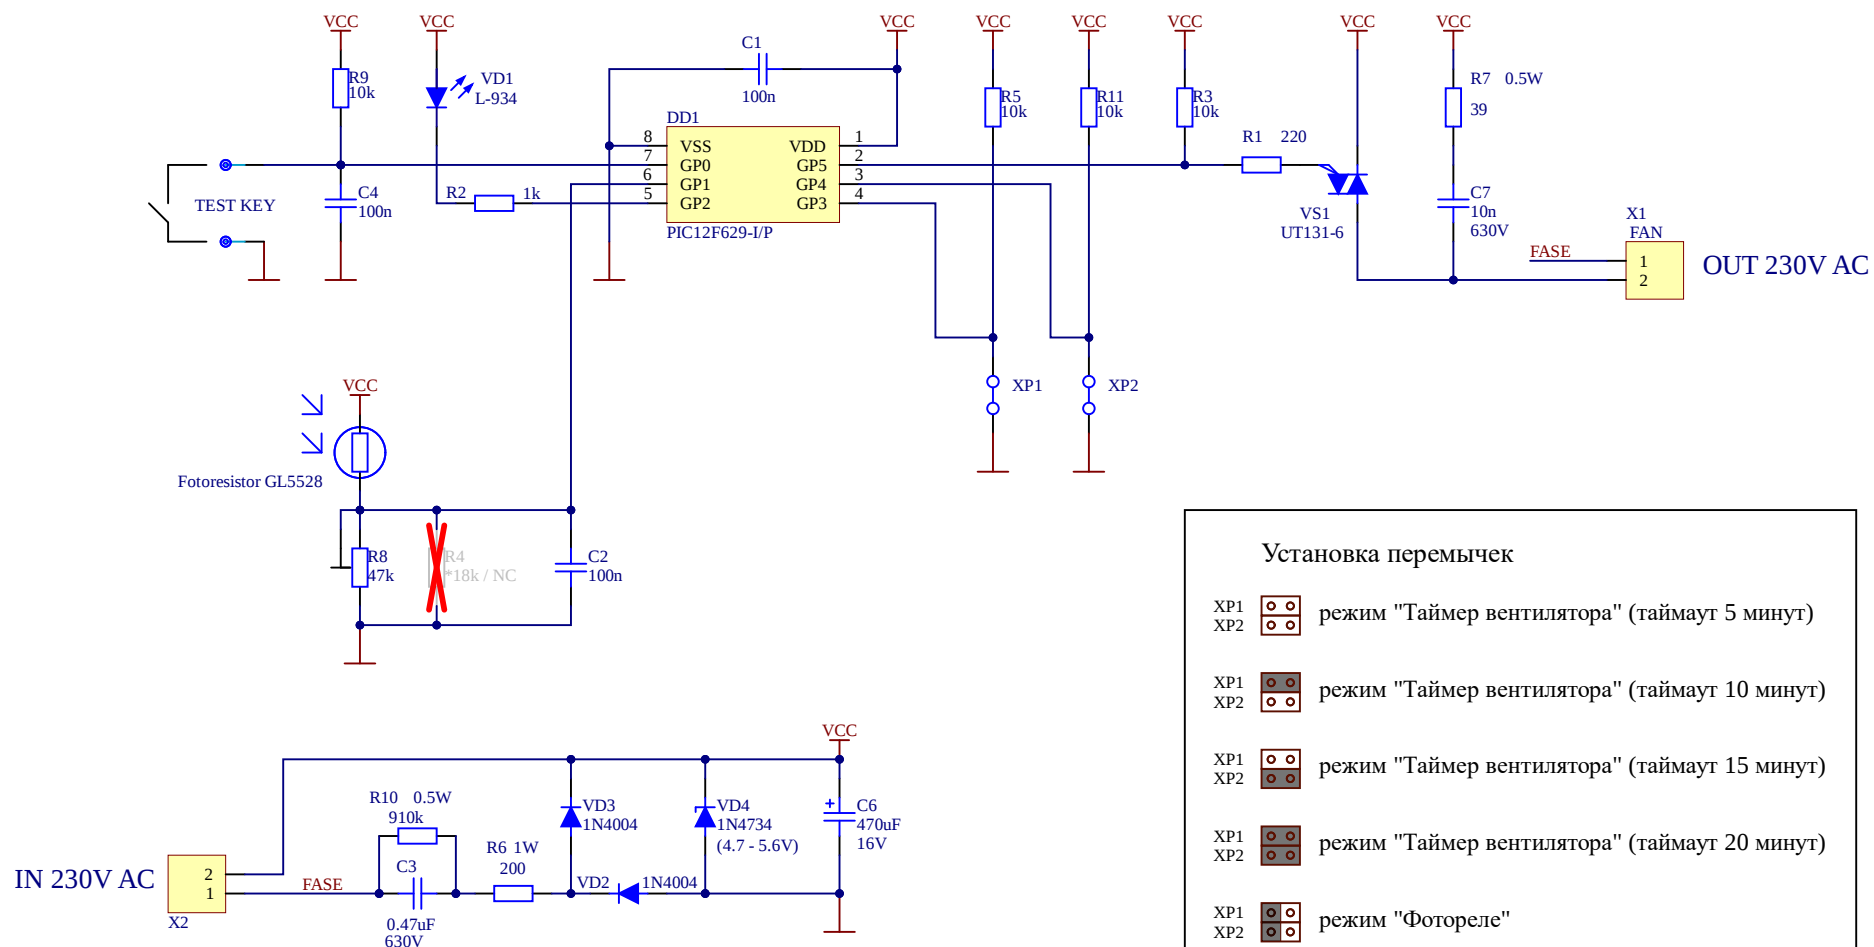