



3-4. SCHEMATIC DIAGRAM

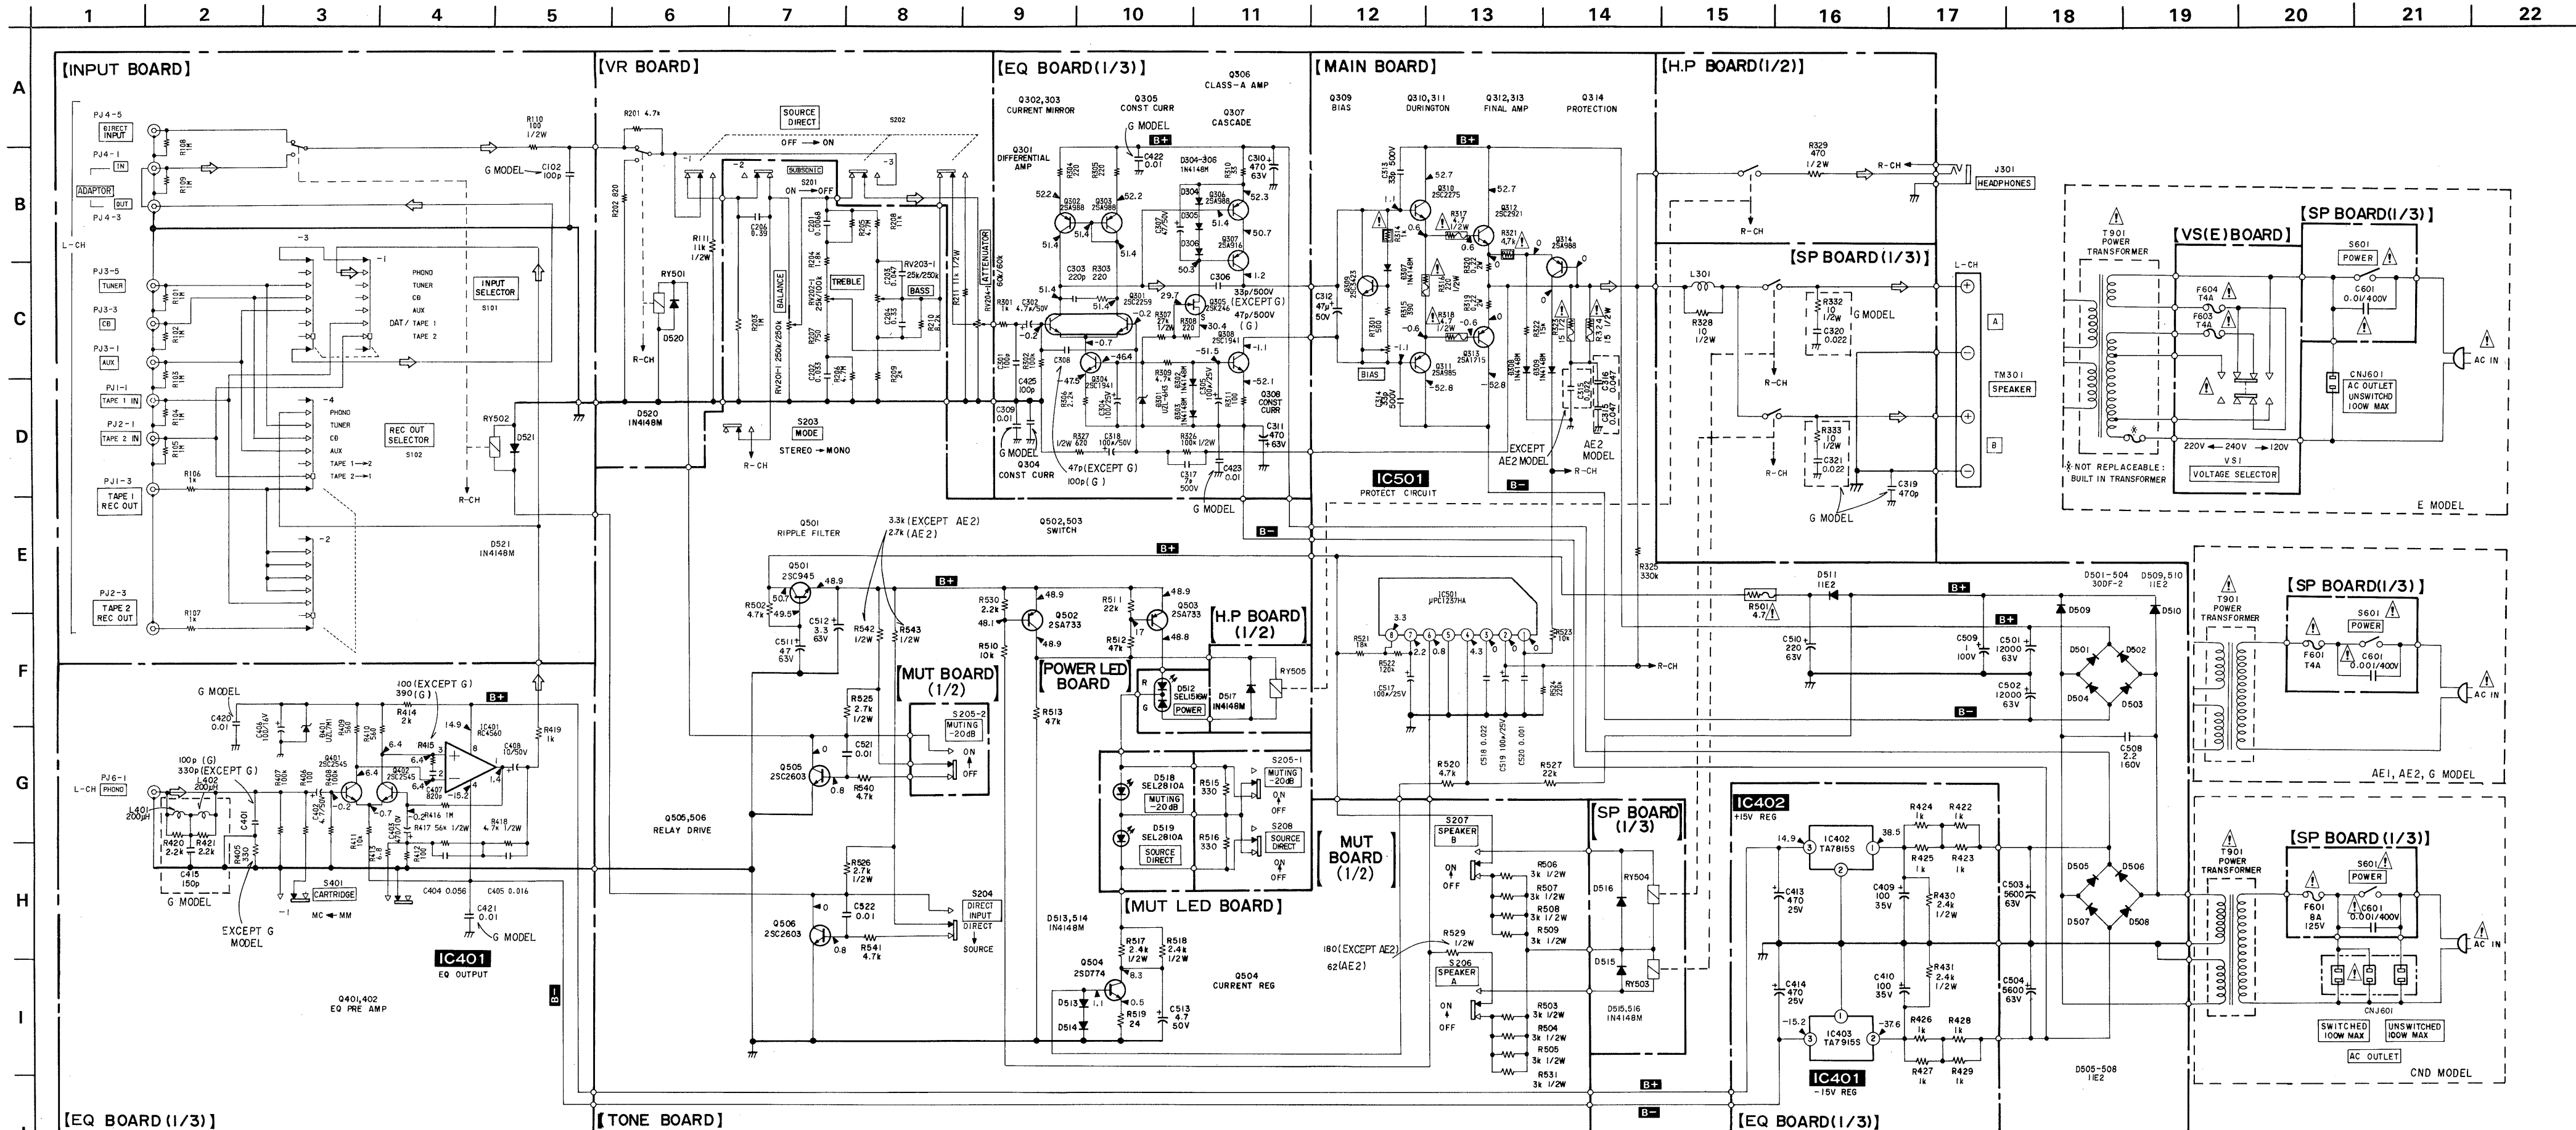

• IC Block Diagram IC501 μ PC1237HA

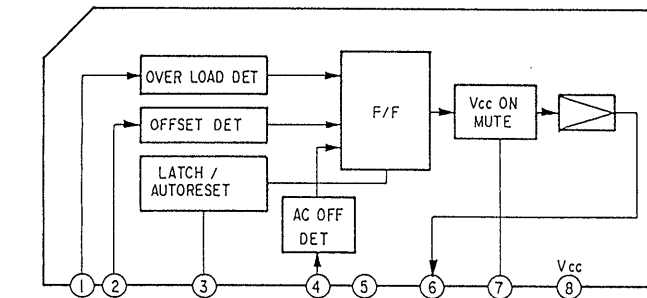

Note:

- All capacitors are in μ F unless otherwise noted. pF: μ F 50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and $\frac{1}{4}$ W or less unless otherwise specified.
- Components for right channel have same values as for left channel. Reference numbers are coded from 150, 250, 350, 450.
- $\square$: nonflammable resistor.
- $\square$: fusible resistor.

Note:

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Note:

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- $\square$: adjustment for repair.
- Voltage are dc with respect to ground under on-signal conditions.
- Voltages are taken with a VOM (Input Impedance 10M Ω). Voltage variations may be noted due to normal production tolerances.
- Signal path.
- $\Rightarrow$: PHONO
- CND: Canadian model
- G: Germany model
- AE 2: North European model