



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES

FERRIWO

1.Mechanical Dimensions

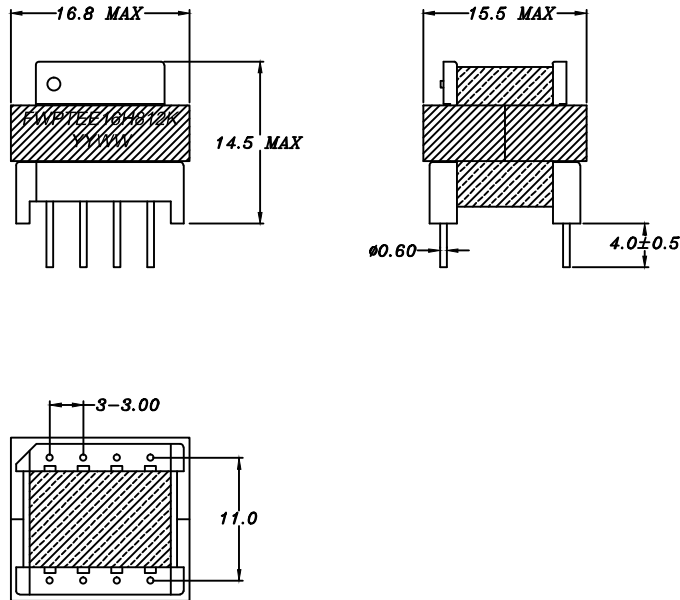

2.Schematic Diagram

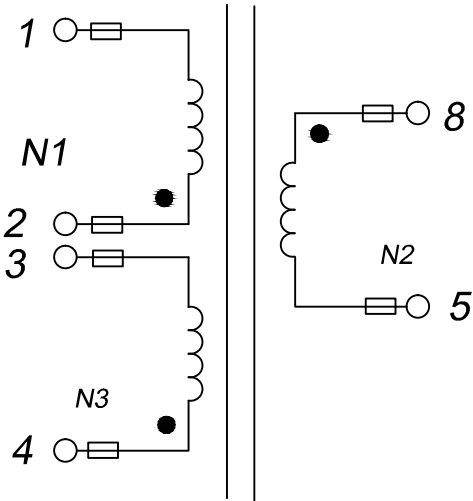

3.Material List

Core:FW40-EE16/7/5

Bobbin:FWB1607 (4+4PIN)

Wire:2UEW-B-0.23/0.25mm 130°C


Operating Temperature: -30 to 115°C

4.Electrical Specification

Inductance: $L(2-1) = 8.1\text{mH} \pm 12\% \text{ 1.0KHZ 1.0V}$

HI-POT: P-S AC3000V5mA3seconds

P、S-CORE AC500V5mA3seconds

REV.	DATE	 Convention Placement	DRW.		Drawing Title: TRANSFORMER Customer P/N:	Part No:
0	00/00		CHK.			FWPTEE16H812K
			APP.			Specification Sheet 1 of 1
RoHS		www.ferriwo.com				