


■ SCHEMATIC DIAGRAM

AX-496

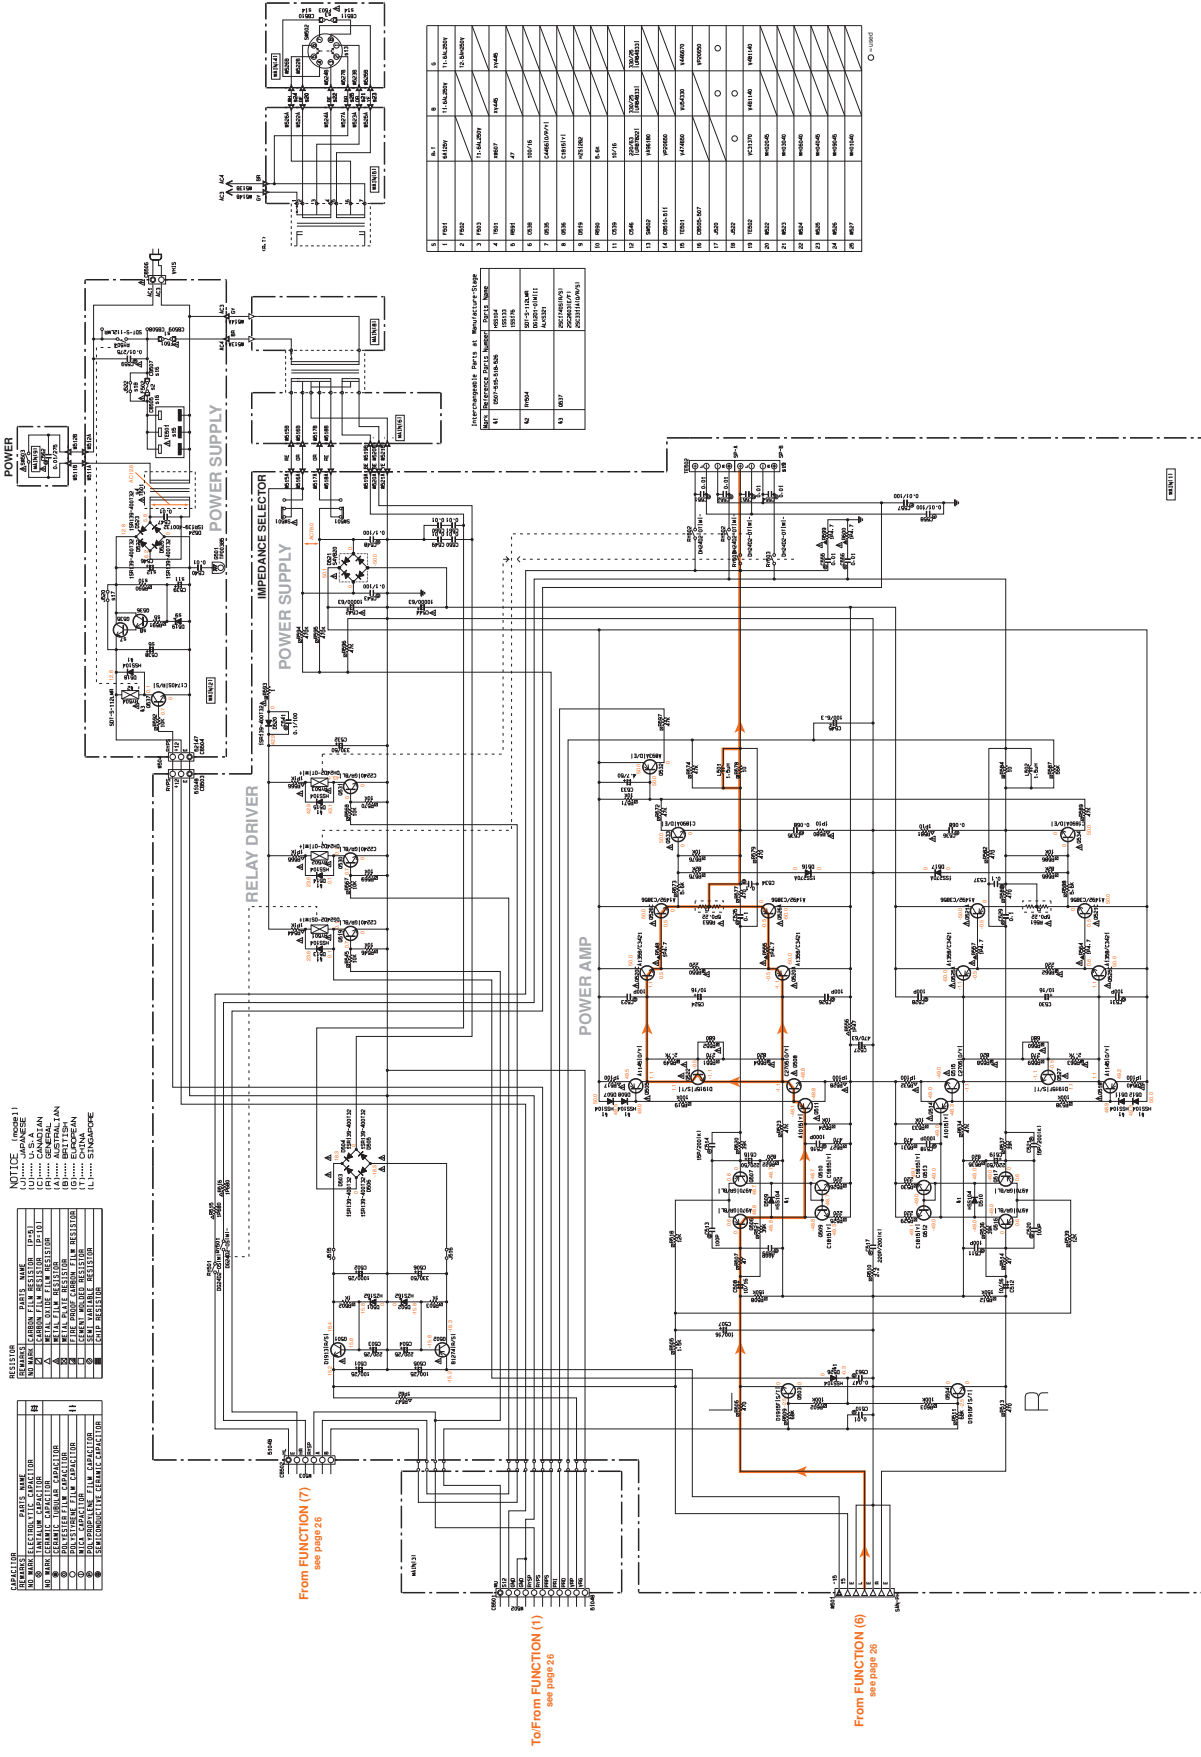

PIN CONNECTION DIAGRAM OF TRANSISTORS, DIODES AND ICs.

2SD1919 1F 2SD1919 5F 2SD1919 5F DTC 144ES 29A933S		25A114S 25C270S 25C281S 25A101S 25A1015 25A1015A 25A863A 25C1890A		25C448B		25A1138		25A1695 25C446B		5A4B20		DIODES 
---	---	--	---	----------------	---	----------------	---	----------------------------	---	---------------	---	---

- ★ All voltage are measured with a 10MΩV DC electric volt meter.
- ★ Components having special characteristics are marked 1, and must be replaced with parts having specifications equal to those originally installed.
- ★ Schematic diagram is subject to change without notice.
- 電圧は、内部抵抗10MΩの電圧計で測定したものです。
- 1印のある部品は、安全性特許部品を示しています。部品の交換が必要なる場合、パーツリストに記載されている部品を使用して下さい。
- 本回路図は標準回路図です。改良のため予告なく変更することがあります。