



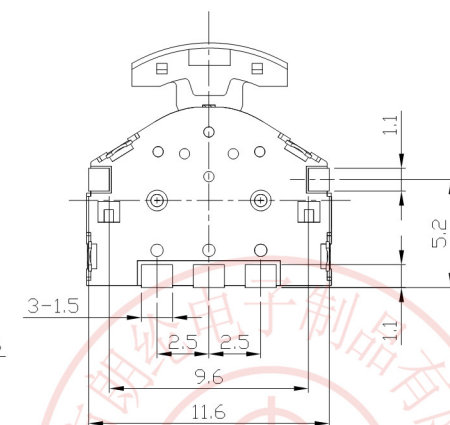

RoHS
Compliant
2002/95/EC



REV.	ECN.	NO.	APPD.

DIMENSIONS

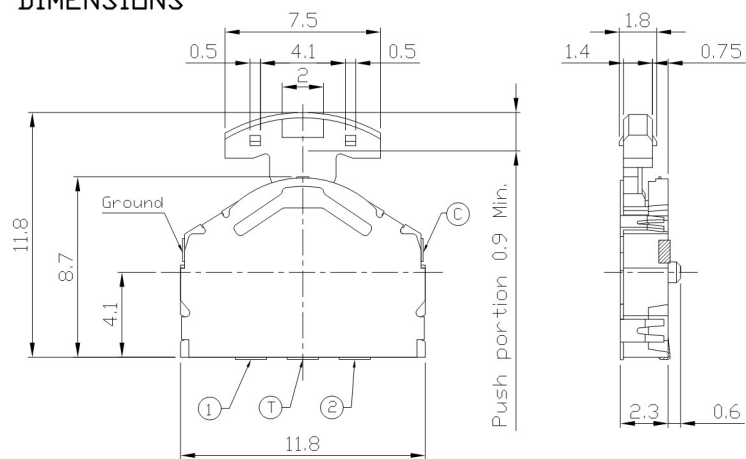

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

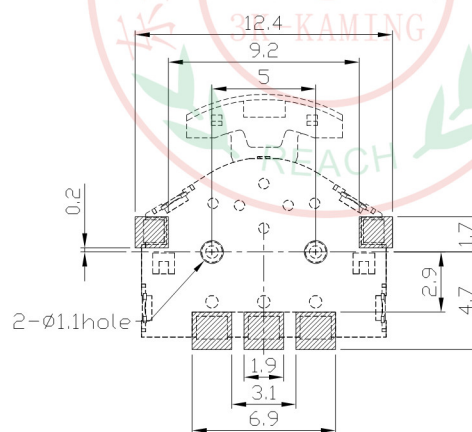

CODE TABLE

CODE TABLE (=DN)


Angle	(25)	(18)	0°	(18)	(25)
Terminal	①	②	③	④	⑤
①					
②					
③					

CCW → CW

PRODUCT IMAGE



CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 5V 10mA	
Output Voltage	1V Min. at 5V 1mA	
Operating Force	Lever	70±50gf
	Center	200±100gf
Travel	Center	0.9mm Min.
Operating Life(cycles)	100,000	



.X ±0.2

X. ±2°

UNITS mm

MAT'L


SEE NOTE

FINISH

SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING (LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING (LANG LUN) INC.



东莞市朗纶电子制品有限公司
Dongguan langlun electronic products Co., Ltd

TITLE:
PUSH LEVER SWITCH

DR: Ricky 2014/04/02

CHKD: Ricky 2014/04/02

APPD:

PART NO.:
AL-1305A SERIES

DWG NO.:
ASI-1305A

SCALE 1:1 SHEET 1/1 REV. A

CUSTOMER DRAWING