
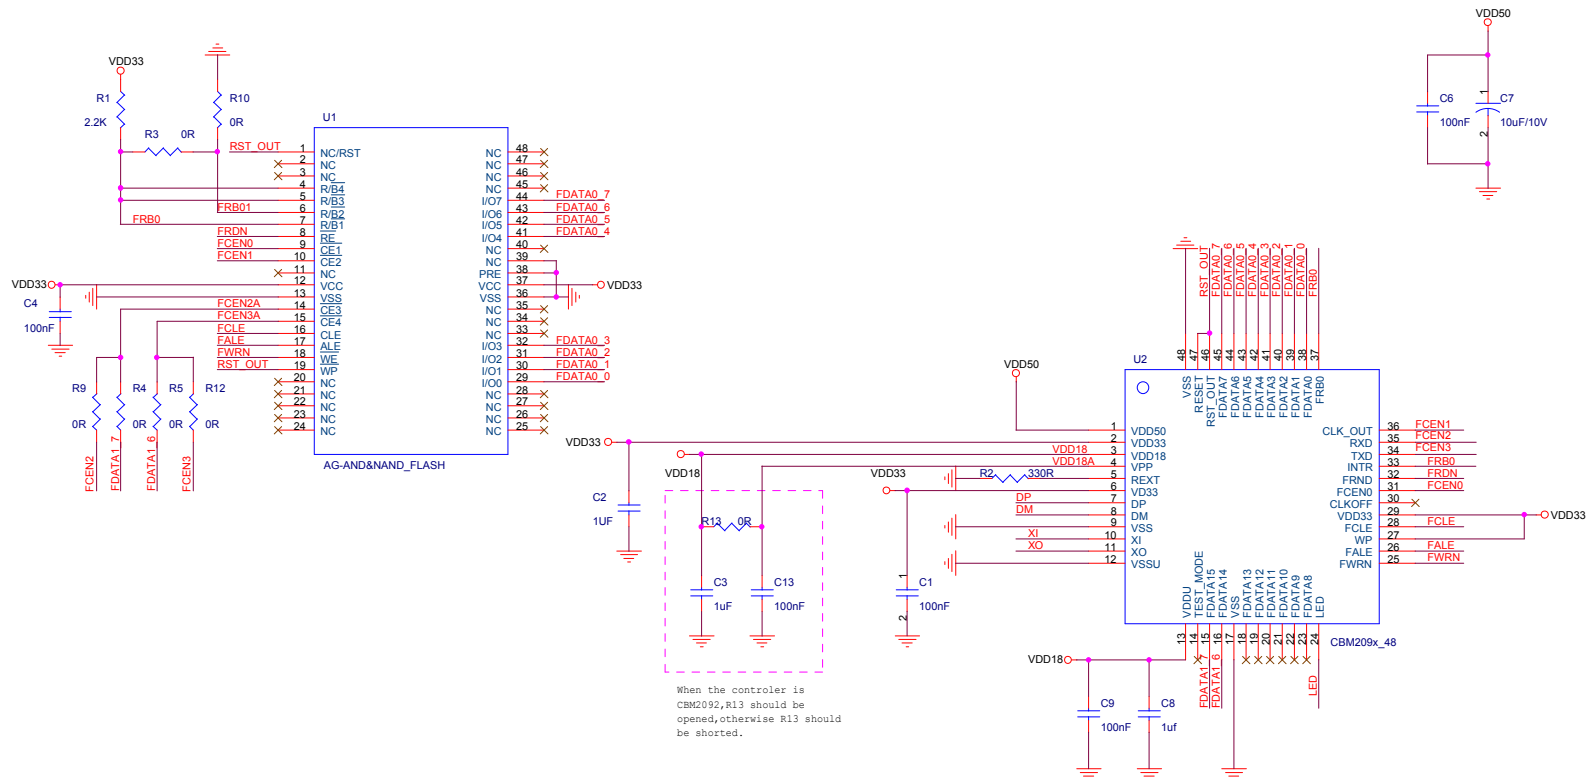


NOTE3:
if don't consider ESD ,The R11 should removed .otherwise all of them should be added .

C8,C9 need Approaches the 13 Pin

Note:

IC Type	CBM2090&CBM2090E	CBM2091
Flash Type	R3 Should be Shorted	R3 Short,R4,R5,R9,R10,R12 Open
2CE Flash	R4,R5,R9,R10,R12 should be opened	
4CE Flash	R3,R4,R5 Should be Shorted	R3,R9,R12 Should be Shorted
Flash 6PIN is GND	R9,R10,R12 should be Opened R10 Should be Shorted, R3,R4,R5,R9,R12 should be opened	R4,R5,R10 should be Opened R10 Should be Shorted, R3,R4,R5,R9,R12 should be opened
others	Please view the Pin configuration of the Flash datasheet	

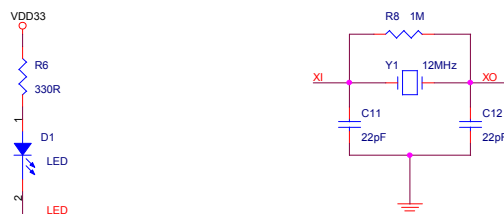

绘制:	alex.wen	
设计:		
版本: V1.04	图纸尺寸: Custom	
最近修改日期: Friday, November 02, 2007	工程名:CBM2090&CBM2090E&CBM2091 Circute	
页码: 1 of 1	文本号: 20070206	
芯邦文件控制等级: Publicity	地 址: 深圳市南山高新区科技中二路软件园4号楼二楼201-205	