


Features

1. High current transfer ratio ($V_{CE0}:300V$ MIN)
(CTR:MIN.600% at $I_F=1mA$, $V_{ce}=2V$)
2. High isolation voltage between input and output
(Viso:5000Vrms).
3. Compact dual-in-line package.
4. Available package : DIP/ SMD/ H. (For Package Dimension please refer to page 82)


Applications

1. System appliances, measuring instruments.
2. Industrial robots.
3. Copiers, automatic vending machines.
4. Signal transmission between circuits of different potentials and impedances.
5. Telephone sets.
6. Copiers, facsimiles.
7. Interface with various power supply circuits, power distribution boards.
8. Numerical control machines.

Outside Dimension : Unit (mm)

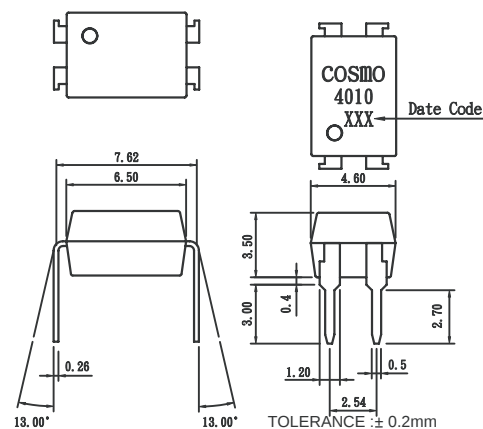

Schematic : Top View



Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input			
Forward current	I_F	50	mA
Peak forward current	I_{FM}	1	A
Reverse voltage	V_R	6	V
Power dissipation	P_D	70	mW
Output			
Collector-emitter voltage	V_{CE0}	300	V
Emitter-collector voltage	V_{ECO}	0.1	V
Collector current	I_C	150	mA
Collector power dissipation	P_C	200	mW
Total power dissipation	P_{tot}	200	mW
Isolation voltage 1 minute	V_{iso}	5000	Vrms
Operating temperature	T_{opr}	-30 to +100	°C
Storage temperature	T_{stg}	-55 to +125	°C
Soldering temperature 10 second	T_{sol}	260	°C

Electro-optical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input						
Forward voltage	V_F	$I_F=20mA$	—	1.2	1.4	V
Peak forward voltage	V_{FM}	$I_{FM}=0.5A$	—	—	3.5	V
Reverse current	I_R	$V_R=4V$	—	—	10	uA
Terminal capacitance	C_t	$V=0$, $f=1kHz$	—	30	—	pF
Output						
Collector dark current	I_{CEO}	$V_{CE}=200V$, $I_F=0$	—	—	1.0	uA
Transfer characteristics						
Current transfer ratio	CTR	$I_F=1mA$, $V_{CE}=2V$	600	—	9000	%
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=20mA$, $I_C=5mA$	—	—	1.5	V
Isolation resistance	Riso	DC500V	5×10^{10}	—	—	ohm
Floating capacitance	C_f	$V=0$, $f=1MHz$	—	0.6	1.0	pF
Cut-off frequency	f_c	$V_{CC}=5V$, $I_C=2mA$, $R_L=100ohm$	—	7	—	kHz
Response time (Rise)	t_r	$V_{CE}=2V$, $I_C=20mA$, $R_L=100ohm$	—	60	300	us
Response time (Fall)	t_f		—	50	250	us

Classification table of current transfer ratio is shown below.

Model NO.	CTR (%)
*KP4010 A	600 TO 2000
KP4010 B	1500 TO 4000
KP4010 C	3000 TO 6000
*KP4010 D	5000 TO 9000
KP4010 E	600 TO 9000

*SPECIAL OPTION

Fig.1 Current Transfer Ratio vs. Forward Current

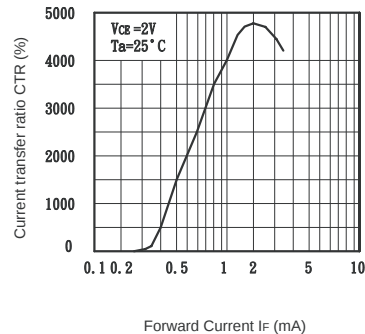


Fig.2 Collector Power Dissipation vs. Ambient Temperature

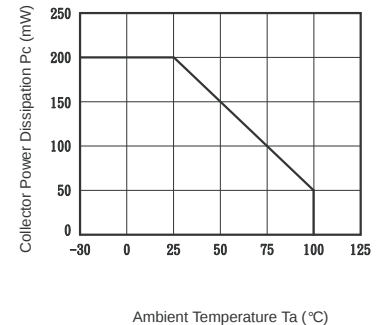


Fig.3 Collector Dark Current vs. Ambient Temperature

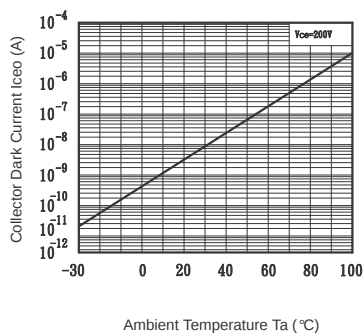


Fig.4 Forward Current vs. Ambient Temperature

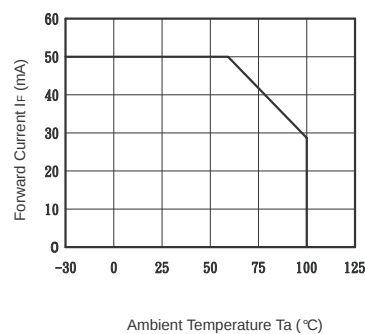


Fig.5 Forward Current vs. Forward Voltage

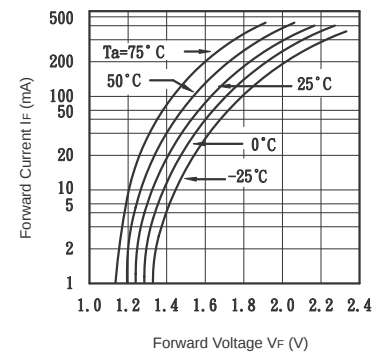


Fig.6 Collector Current vs. Collector-emitter Voltage

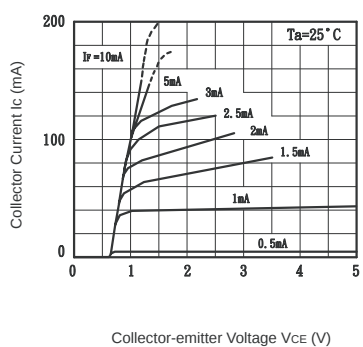


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

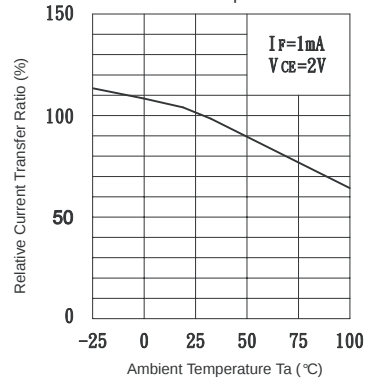


Fig.8 Collector-emitter Saturation Voltage vs. Forward Current

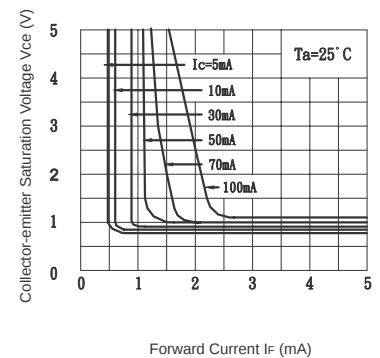


Fig.9 Response Time vs. Load Resistance

