


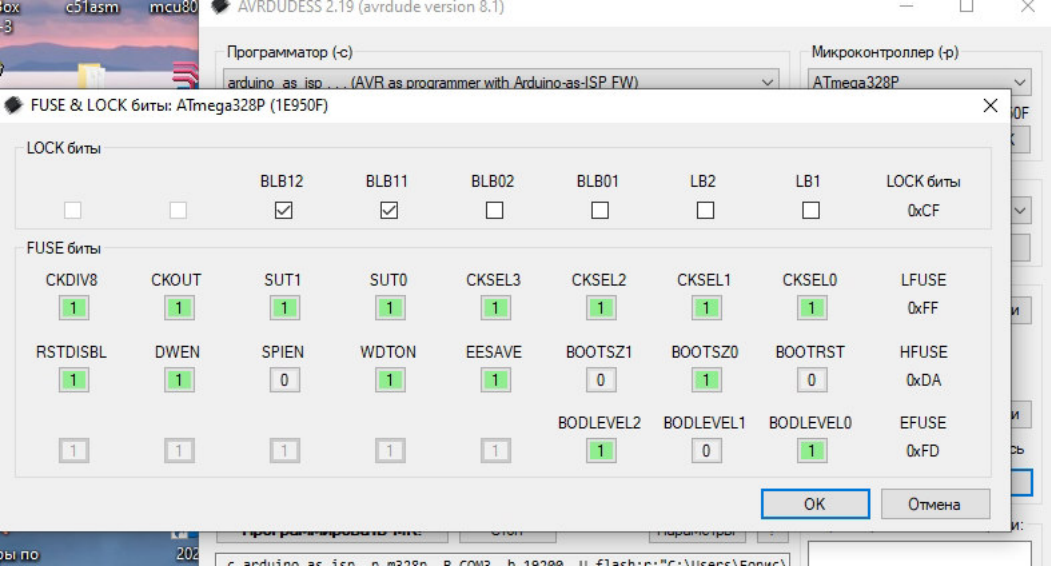

Программатор (-c)

arduino_as_isp... (AVR as programmer with Arduino-as-ISP FW)

Микроконтроллер (-p)

ATmega328P

FUSE & LOCK биты: ATmega328P (1E950F)

LOCK биты

BLB12

BLB11

BLB02

BLB01

LB2

LB1

LOCK биты

0xCF

FUSE биты

CKDIV8

CKOUT

SUT1

SUT0

CKSEL3

CKSEL2

CKSEL1

CKSEL0

LFUSE

0xFF

RSTDISBL

DWEN

SPIEN

WDTON

EESAVE

BOOTSZ1

BOOTSZ0

BOOTRST

HFUSE

0xDA

BODLEVEL2

BODLEVEL1

BODLEVEL0

EFUSE

0xFD

OK

Отмена