

SPEC.No.

TQ3C-8EAS0-E1CRG13-00

DATE

November 4, 2003

S P E C

FOR :

TYPE:KG057QV1CB-G00

C O N T E N T S

1. Application
2. Construction and Outline
3. Mechanical Specifications
4. Absolute Maximum Ratings
5. Electrical Characteristics
6. Optical Characteristics
7. Circuit Block Diagram
8. Interface Signals
9. Interface Timing Chart
10. Input Timing Characteristics
11. Supply Voltage Sequence Condition
12. Backlight Characteristics
13. Design Guidance for Analog Touch-Panel(T/P)
14. Lot Number Identification
15. Warranty
16. Precautions for Use
17. Reliability Data / Environmental Test
18. Outline Drawing

Issued

Date: NOV. 05.2003



Hayato LCD Division

KYOCERA CORPORATION
KAGOSHIMA HAYATO PLANT
LCD DIVISION

This specification is subject to change without notice.
Consult Kyocera before ordering.

Original	Designed by :Engineering Dept.			Confirmed by :QA Dept.	
Issue Data	Prepared	Checked	Approved	Checked	Approved
November 4, 2003	W. Yano	M. Fujitani	H. Ohno	Y. Matsumoto	S. Hayashi

Caution

1. This Kyocera LCD module has been specifically designed for use only in electronic devices in the areas of audio control, office automation, industrial control, home appliances, etc. The modules should not be used in applications where module failure could result in physical harm or loss of life, and Kyocera expressly disclaims any and all liability relating in any way to the use of the module in such applications.
2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, losses, damages, liabilities, awards, costs, and expenses, including legal fees, resulting from or arising out of Customer's use, or sale for use, of Kyocera modules in applications.
3. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

Revision Record

Date	Designed by: Engineering Dept.			Confirmed by: QA Dept.	
	Prepared	Checked	Approved	Checked	Approved
Rev. No.	Date	Page	Descriptions		

1. Application

This data sheet defines the specification for a 320×240 dot, Transmissive monochrome mode dot matrix type Liquid Crystal Display with CFL backlight.

2. Construction and Outline

320×240 dots, COG type LCD with CFL backlight.


Backlight system : Side-edge type CFL (1 tube).

Inverter : option.
Recommended Inverter : PH-BLC08-K3 (HITACHI MEDIA ELECTRONICS)
or Equivalent.

Polarizer : Glare treatment.

Additional circuit : Bias voltage circuit, Randomizing circuit, DC-DC converter

Touch panel : Analog type. Non-Glare treatment.

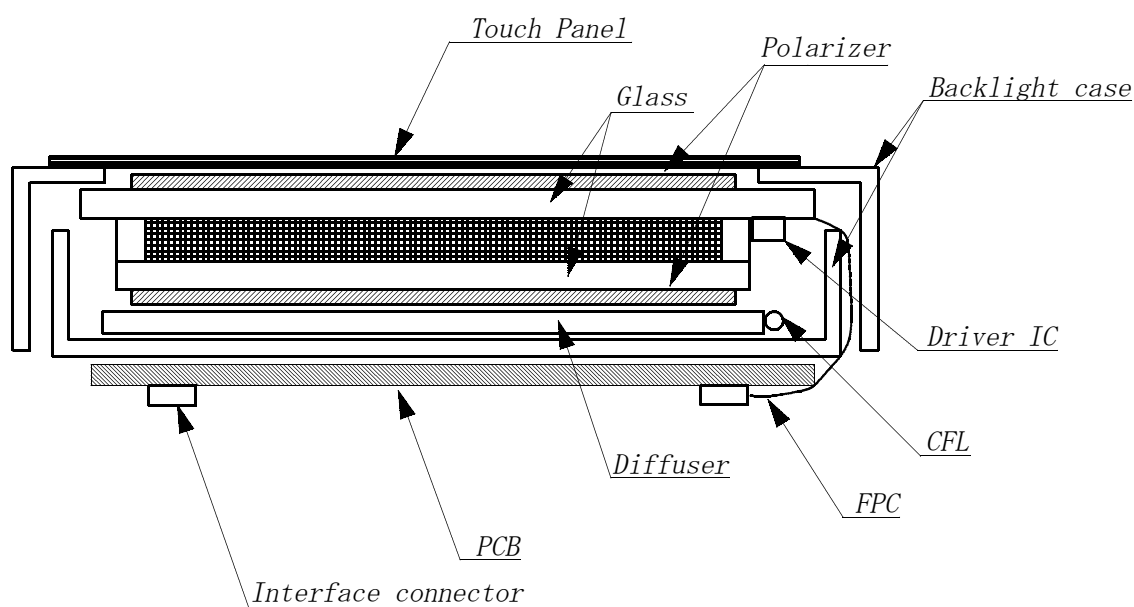

This drawing is showing conception only

3. Mechanical Specifications

3-1. Mechanical Specifications Electrical of LCD panel

ITEM	SPECIFICATION	UNIT
Outline dimensions	144 (W) × 104.8 (H) × 14.5 (D)	mm
Effective viewing area	117.2 (W) × 88.4 (H)	mm
Dot number	320 (W) × 240 (H)	Dots
Dot size	0.34 (W) × 0.34 (H)	mm
Dot pitch	0.36 (W) × 0.36 (H)	mm
Display color *1	White *2	—
Base color *1	Black *2	—
Mass	(220)	g

*1 Due to the characteristics of the LC material, the color vary with environmental temperature.

*2 Negative-type display

Display data "H" : Dots ON : White

Display data "L" : Dots OFF : Black

3-2. Mechanical Specifications Electrical of touch panel

ITEM	SPECIFICATION	UNIT
Input	Radius-0.8 stylus or Finger	—
Actuation Force	0.5N±0.3N	g
Transmittance	Typ. 80	%
Surface hardness	pencil hardness 2H or more according	—

4. Absolute Maximum Ratings

4-1. Electrical absolute maximum ratings

ITEM	SYMBOL	MIN.	MAX.	UNIT
Supply voltage for logic	VDD	0	7.0	V
Supply voltage for LCD driving	VCONT	0	VDD	V
Input signal voltage *1	Vin	0	VDD	V
FRM frequency	fFRM	—	150	Hz
Touch Panel Supply voltage	Vtp	0	6.0	V
Touch Panel Input Current	Itp	0	0.5	mA

*1 Input signal : CP, LOAD, FRM, DISP, D0~D3

4-2. Environmental absolute maximum ratings

ITEM	SYMBOL	MIN	MAX	UNIT
Operating temperature *1	Top	0	60	°C
Storage temperature *2	T _{STO}	-20	60	°C
Operating humidity *3	Hop	10	*4	%RH
Storage humidity *3	H _{STO}	10	*4	%RH
Vibration	—	*5	*5	—
Shock	—	*6	*6	—

*1 LCD's display quality shall not be guaranteed at the temperature range of :
below 0°C and upper 40°C.

*2 Temp. = -20°C < 48 h. , Temp = 60°C < 168 h.
Store LCD panel at normal temperature/humidity. Keep it free from vibration and shock.
LCD panel that is kept at low or high temperature for a long time can be defective due to
the other conditions, even if the temperature satisfies standard. (Please refers to
16. Precautions for use as detail).

*3 Non-condensation.

*4 Temp. ≤ 40°C, 85% RH Max.

Temp. > 40°C, Absolute Humidity shall be less than 85%RH at 40°C.

*5

Frequency	10~55 Hz	Converted to acceleration value: (0.3~9m/s ²)
Vibration width	0.15 mm	
Interval	10-55-10 Hz 1 minute	

2 hours in each direction X/Y/Z (6 hours as total)

EIAJ ED-2531.

*6 Acceleration: 490m/s²

Pulse width : 11 ms

3 times in each direction : ±X/±Y/±Z.

EIAJ ED-2531.

5. Electrical Characteristics

5-1. VDD = 5.0V


VDD = 5V±5%, Temp. = 0~60°C

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply voltage for logic	VDD	—	4.75	5.00	5.25	V
LCD driving voltage *1	V _{op} =VCONT	0 °C	(1.35)	—	—	V
		25 °C	(1.45)	(1.95)	(2.45)	V
		60 °C	—	—	(2.55)	V
Input voltage	Vin	"H" level	0.8VDD	—	VDD	V
		"L" level	0	—	0.2VDD	V
Clock frequency	f _{cp}	—	1.34	1.44	7.1	MHz
Frame frequency *2	f _{FRM}	—	70	75	80	Hz
Current consumption for logic	IDD	*3	—	(28.5)	(42.8)	mA
Power consumption	Pdisp		—	(142.5)	(214.0)	mW

*1 Maximum contrast ratio is obtained by adjusting the LCD supply voltage (V_{op}= VCONT) for driving LCD.

*2 In consideration of display quality, it is recommended that frame frequency is set in the range of 70-80Hz. When you have to use higher frame and clock frequencies, confirm the LCD's performance and quality prior to finalizing the frequency values: Generally, as frame and clock frequencies become higher, current consumption will get bigger and display quality will be degraded.

*3 Display high frequency pattern, (see below).
VDD = 5V , V_{op} = VCONT , f_{FRM} = 75 Hz , f_{cp} = 1.44MHz , Temp. = 25°C
Pattern:

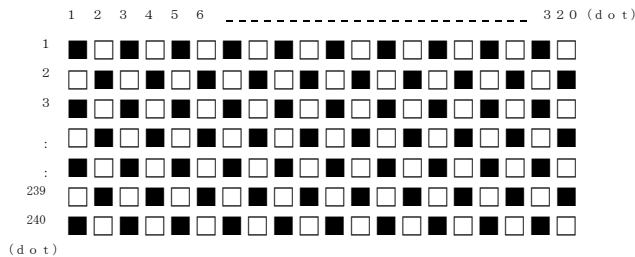

5-2. VDD = 3.3V


VDD = 3.3V±0.3V, Temp. = 0~60℃

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply voltage for logic	VDD	—	3.0	3.3	3.6	V
LCD driving voltage *1	Vop=VCONT	0 °C	(1.35)	—	—	V
		25 °C	(1.45)	(1.95)	(2.45)	V
		60 °C	—	—	(2.55)	V
Input voltage	Vin	"H" level	0.8VDD	—	VDD	V
		"L" level	0	—	0.2VDD	V
Clock frequency	f _{cp}	—	1.34	1.44	7.1	MHz
Frame frequency *2	f _{FRM}	—	70	75	80	Hz
Current consumption for logic	IDD	*3	—	(41.5)	(62.3)	mA
Power consumption	Pdisp		—	(137.0)	(205.6)	mW

*1 Maximum contrast ratio is obtained by adjusting the LCD supply voltage (Vop= VCONT) for driving LCD.

*2 In consideration of display quality, it is recommended that frame frequency is set in the range of 70-80Hz. When you have to use higher frame and clock frequencies, confirm the LCD's performance and quality prior to finalizing the frequency values: Generally, as frame and clock frequencies become higher, current consumption will get bigger and display quality will be degraded.

*3 Display high frequency pattern, (see below).
VDD = 3.3V , Vop = VCONT , f_{FRM} = 75 Hz , f_{cp} = 1.44MHz , Temp. = 25℃
Pattern:

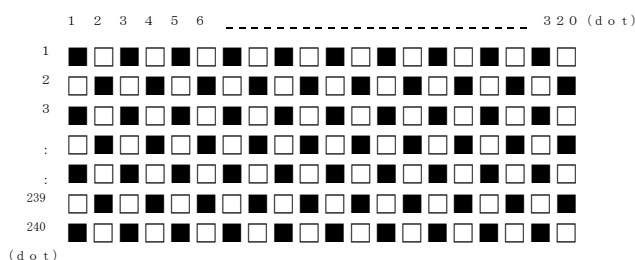

5-3. Touch Panel

5-3-1. Terminal resistance

Between xL and xR : 200~1000Ω

Between yU and yL : 200~1000Ω

5-3-2. Linearity

± 1.5%

5-3-3. Insulation resistance

100MΩ or more at DC25V

6. Optical Characteristics

Temp. = 25°C



ITEM		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Response time	Rise	Tr	$\theta = \phi = 0^\circ$		—	210	310	ms
	Down	Td	$\theta = \phi = 0^\circ$		—	130	230	ms
Viewing angle range		θ	$CR \geq 2$	$\phi = 0^\circ$	-40	—	20	deg.
		ϕ		$\theta = 0^\circ$	-45	—	45	deg.
Contrast ratio		CR	$\theta = \phi = 0^\circ$		5.0	10.0	—	—
Brightness		L	IL=4.0mA		120	180	—	cd/m ²
Chromaticity coordinates	White	x	$\theta = \phi = 0^\circ$		0.26	0.31	0.36	—
		y			0.25	0.30	0.35	
	Black	x	$\theta = \phi = 0^\circ$		0.28	0.33	0.38	
		y			0.27	0.32	0.37	

Optimum contrast is obtained by adjusting the LCD driving voltage (Vop) while at the viewing angle of $\theta = \phi = 0^\circ$.


6-1. Contrast ratio is defined as follows:

$$CR = \frac{\text{Brightness at all pixels "White"}}{\text{Brightness at all pixels "Black"}}$$


6-2. Definition of viewing angle

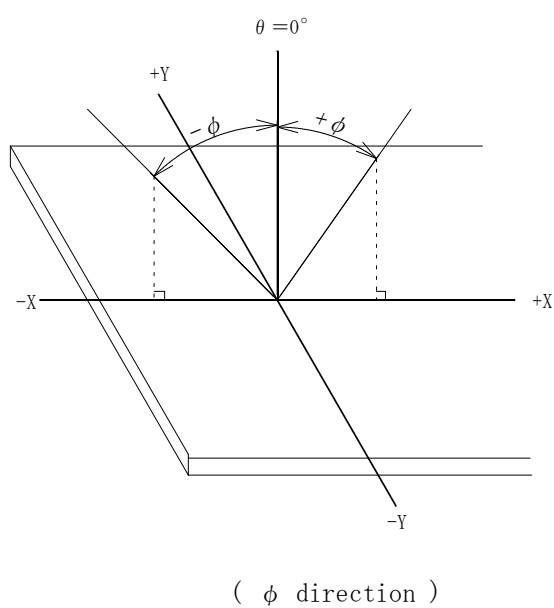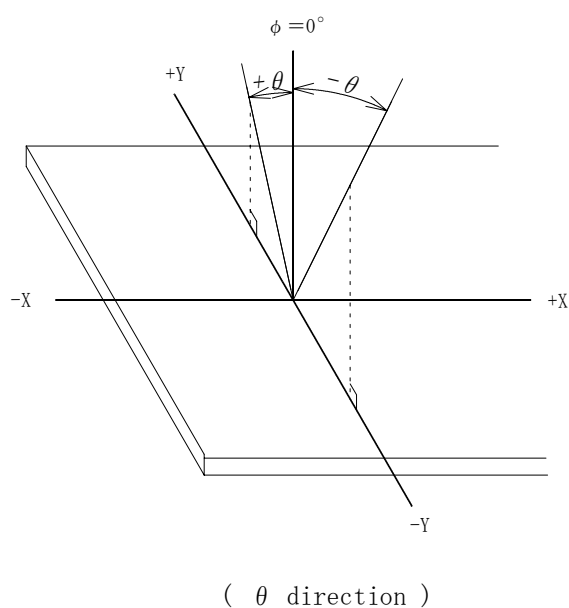


6-3. Definition of Vop

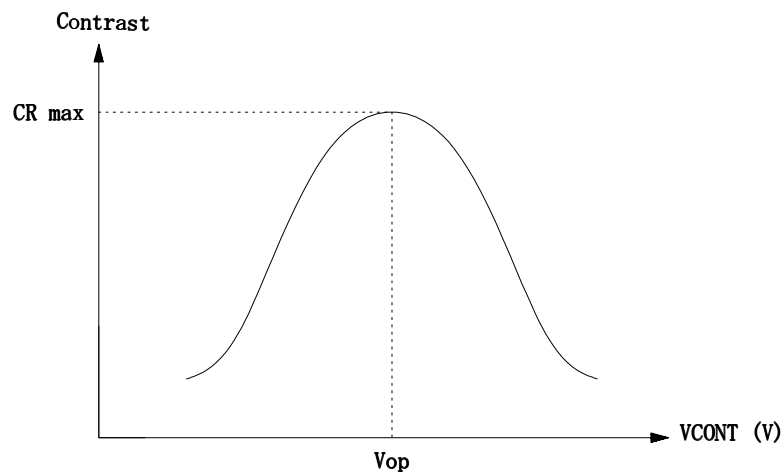

6-4. Definition of response time

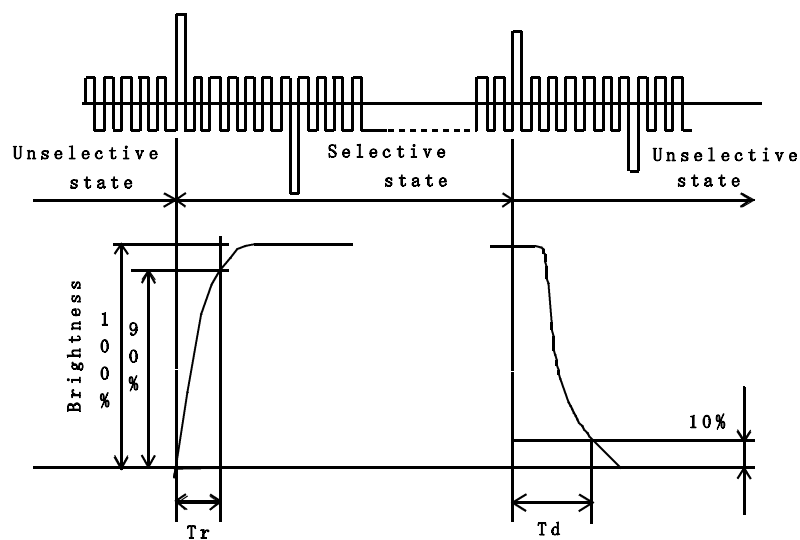


6-5. Measuring points

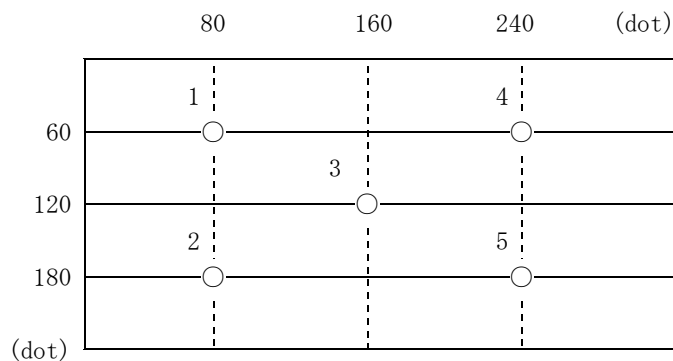


- 1) Rating is defined as the average brightness inside the viewing area.
- 2) 30 minutes after CFL is turned on. (Ambient Temp.=25°C)
- 3) The inverter should meet the eccentric conditions;
-Sine, symmetric wave form without spike in positive and negative.
- 4) Measuring Inverter : PH-BLC08-K3 (HITACHI MEDIA ELECTRONICS)

7. Circuit Block Diagram

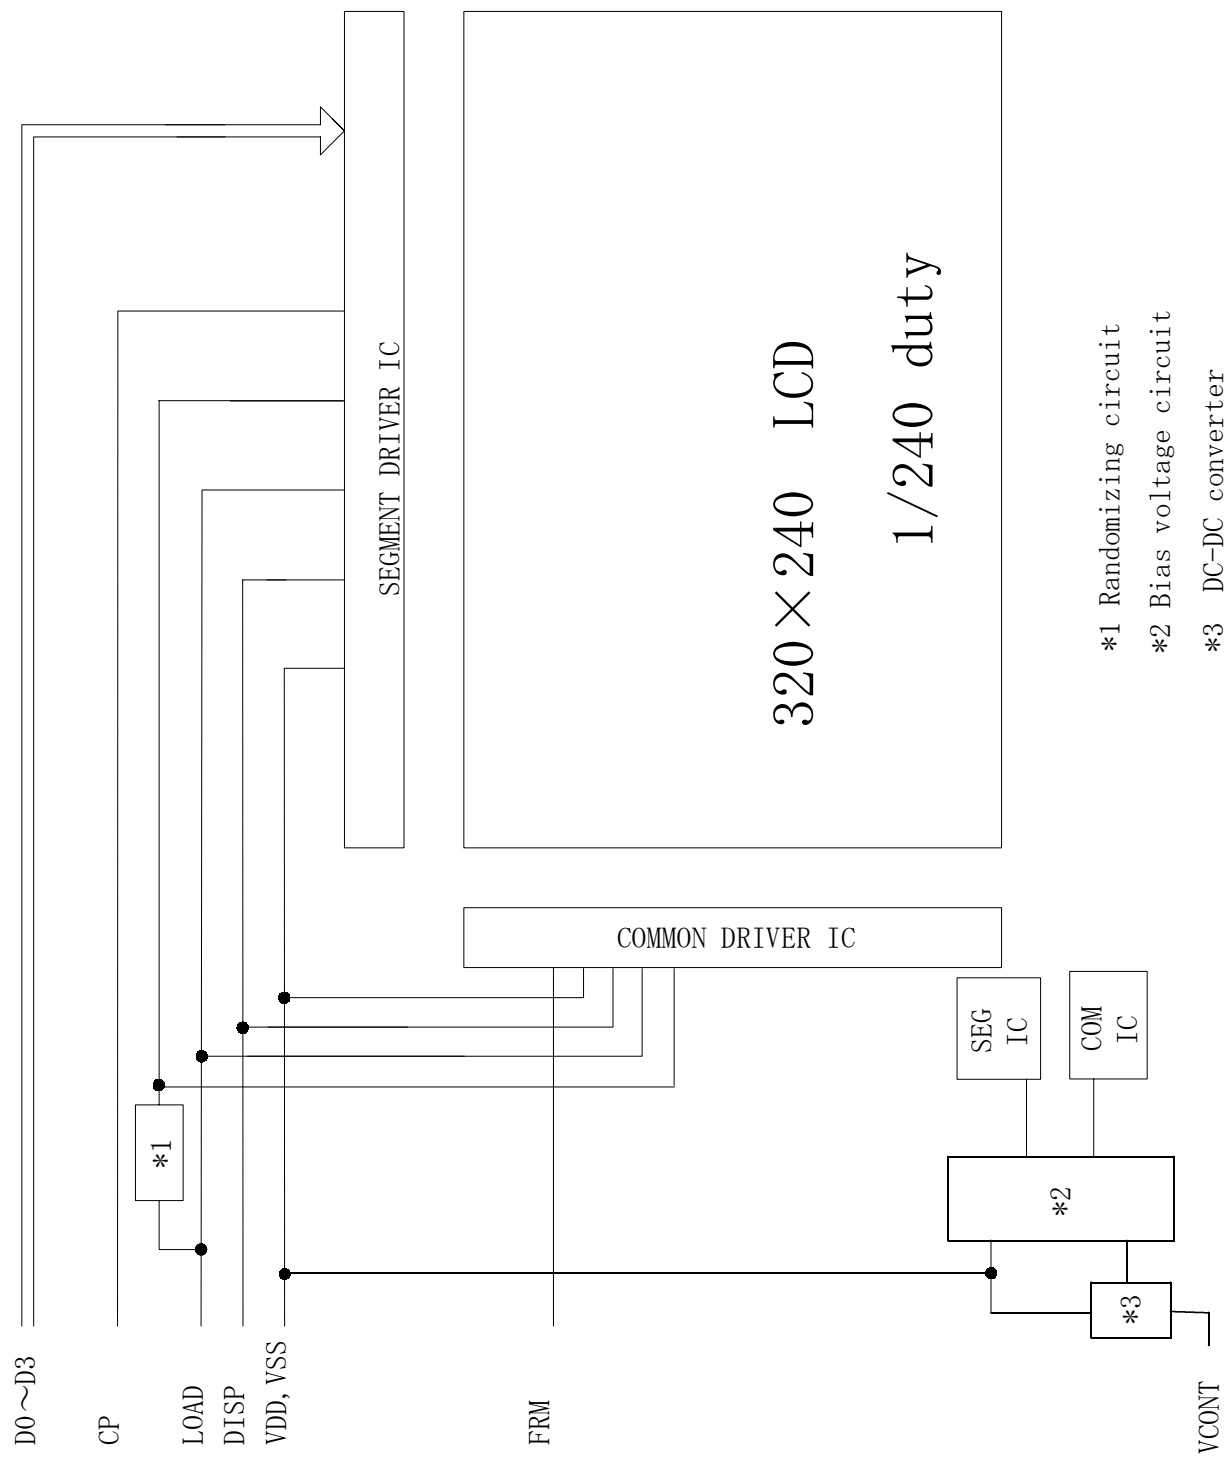

7-1. Power supply

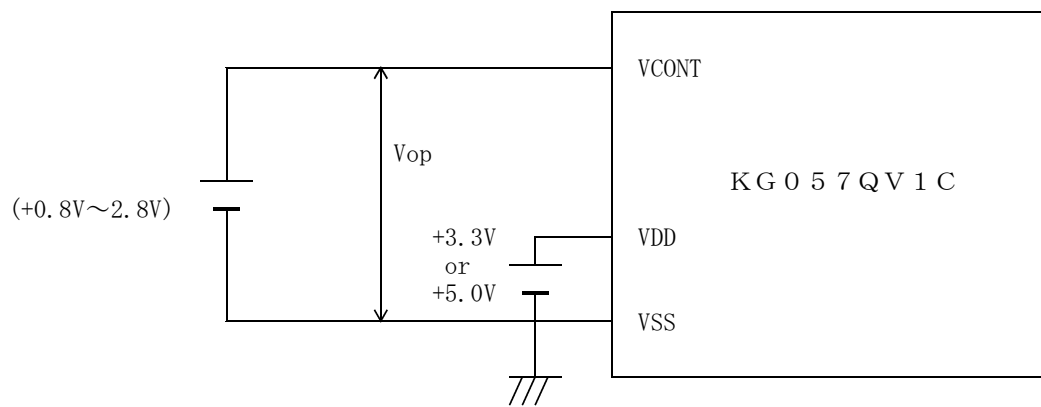

8. Interface Signals

8-1. LCD

PIN NO.	SYMBOL	DESCRIPTION	LEVEL
1	FRM	Synchronous signal for driving scanning line	H
2	LOAD	Data signal latch clock	H → L
3	CP	Data signal shift clock	H → L
4	DISP	Display control signal	H(ON), L(OFF)
5	VDD	Power supply for logic	—
6	VSS	GND	—
7	VCONT	LCD adjust voltage	—
8	NC	No connect	—
9	NC		
10	NC		
11	NC		
12	D3	4 bit parallel data.	H(ON), L(OFF)
13	D2		
14	D1		
15	D0		
16	VDD	Power supply for logic	—
17	VDD		
18	VSS	GND	—
19	VSS		
20	VSS		

LCD side connector : 08-6210-020-340-800 (ELCO)

Recommended matching connector : 0.5mm pitch FFC or FPC

8-2. CFL

PIN No.	SYMBOL	DESCRIPTION
1	HOT	Inverter output high voltage side
2	NC	—
3	COLD	Inverter output low voltage side


LCD side connector : BHR-03VS-1 (JST)

Recommended matching connector : SM02-(8.0)B-BHS-1 (JST)

8-3. Touch panel

PIN No.	SYMBOL	DESCRIPTION
1	yU	y-Upper terminal
2	xL	x-Left terminal
3	yL	y-Lower terminal
4	xR	x-Right terminal


9. Interface Timing Chart

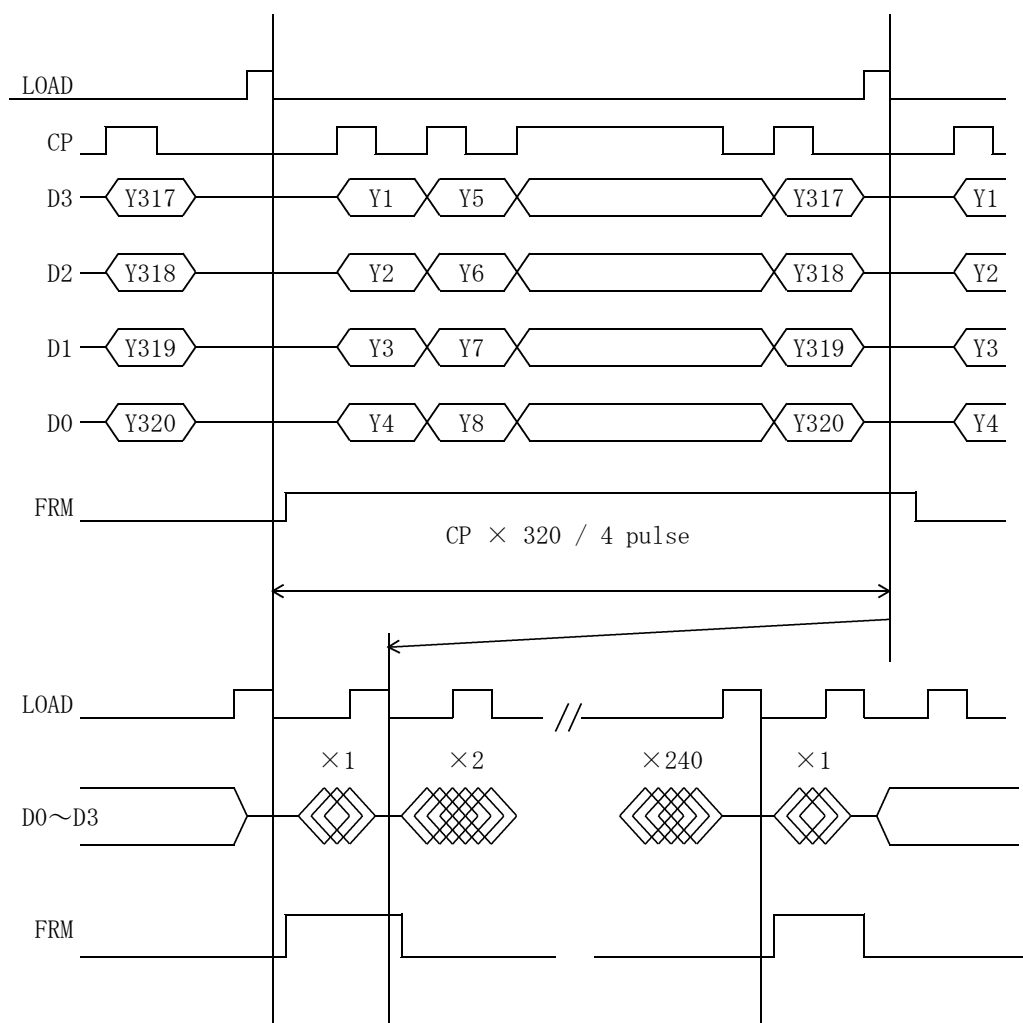

* The cycle of load signal should be stable and continuously applied without interruption.

* The above-mentioned timing chart shows a reference to set up a LCD module, not an electrical rating.

1 0. Input Timing Characteristics

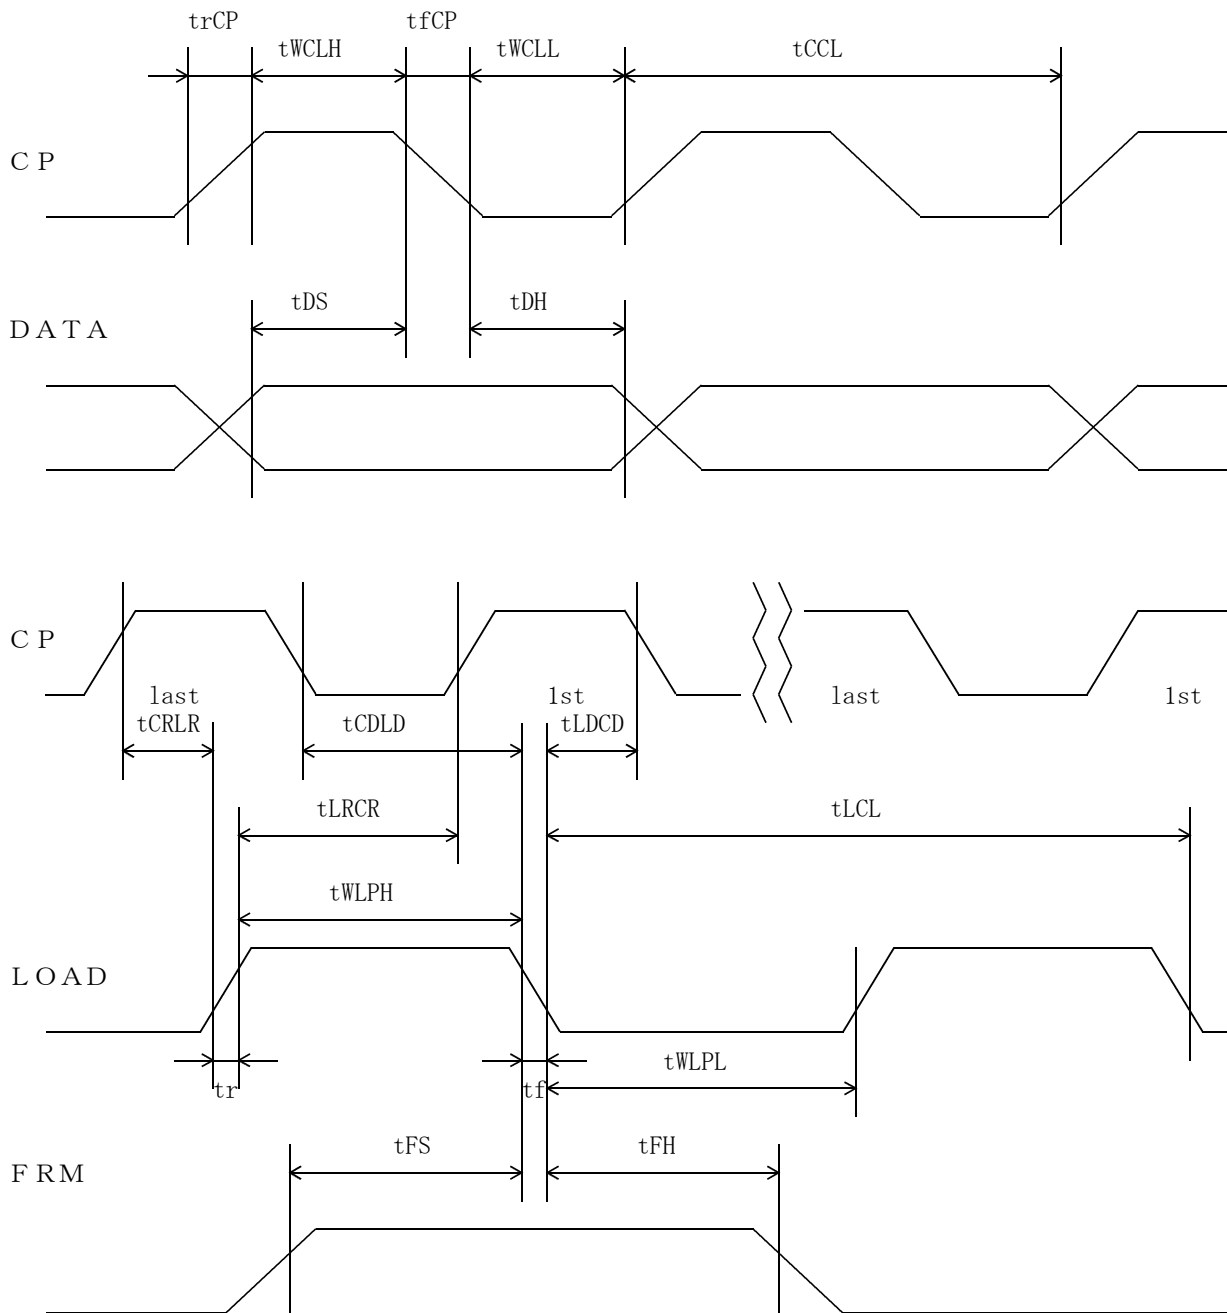

10-1. Switching characteristics

Input Characteristics ; VDD = +3.3V $\pm$ 0.3V and +5.0V $\pm$ 5%, Temp. = 0~60 $^{\circ}$ C

ITEM	SYMBOL	MIN.	MAX.	UNIT
CP Cycle *1,*2	tCCL	140	—	ns
CP "H" Pulse Width *2	tWCLH	60	—	ns
CP "L" Pulse Width *2	tWCLL	60	—	ns
CP Rise Up Time *2	trCP	—	40	ns
CP Fall Down Time *2	tfCP	—	40	ns
Data Set Up Time	tDS	40	—	ns
Data Hold Time	tDH	50	—	ns
LOAD "H" Pulse Width	tWLPH	60	—	ns
LOAD "L" Pulse Width	tWLPL	300	—	ns
LOAD Cycle *3	tLCL	400	—	ns
CP Rise→LOAD Rise Delay Time	tCRLR	10	—	ns
CP Down→LOAD Down Delay Time	tCDLD	60	—	ns
LOAD Rise→CP Rise Delay Time	tLRCR	60		ns
LOAD Down→CP Down Delay Time	tLD CD	60		ns
Input Signal Rise Up Time	tr	—	40	ns
Input Signal Fall Down Time	tf	—	40	ns
FRM Data Set Up Time	tFS	40	—	ns
FRM Data Hold Time	tFH	60	—	ns

*1 CP Cycle is adjust so that FRM signal is 75Hz.

*2 The formula of condition

① $trCP + tfCP < tCCL - (tWCLH + tWCLL)$

② $trCP, tfCP \leq 30 \text{ ns}$


Please use on condition that ①, ② are filled.

*3 LOAD Cycle is const.

1 1. Supply Voltage Sequence Condition

DO NOT apply DC voltage to the LCD panel. DC voltage induce irreversible electrochemical reactions and reduce LCD life. Always follow the power supply ON/OFF sequence of VDD first, input signal second, V0-V5 third and finally DISP.

This will prevent DC driving of the LCD or CMOS LSI latch up as shown below.

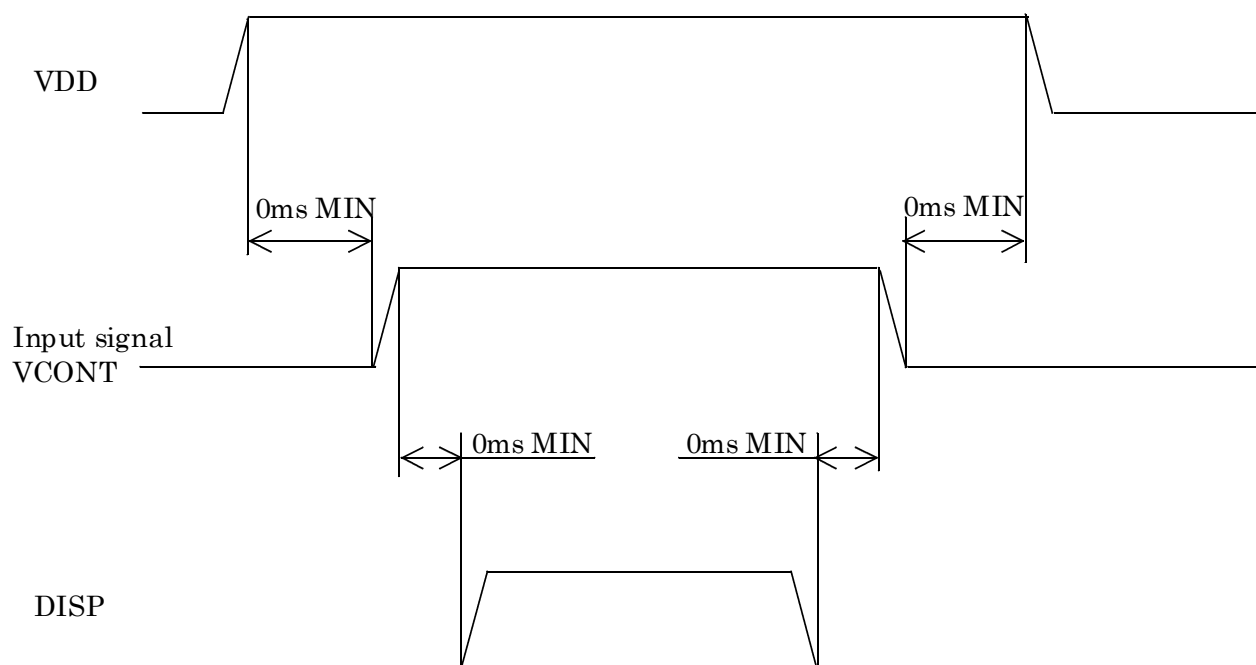

- * Input signal : CP, LOAD, FRM, D0~D3
- * The above sequence should be designed as to keep each normal figure on condition that liquid crystal module is loaded on your system.
- * Control the input signal and VEE to the above ON - OFF timing when you switch ON/OFF the display during VDD and DISP are on.
And also design the circuit as VEE's OFF level become GND level.
- * Control the supply voltage sequence not to float all signal line when the LCD panel is driving.

1 2. Backlight Characteristics

CFL ratings

Temp. = 0~60℃

ITEM	SYMBOL	MIN.	TYP.	MAX.	NOTE
Starting discharge Voltage *1	VS	—	—	(795) Vrms.	0 °C
		—	—	(530) Vrms.	25 °C
Discharging tube current *2	IL	(3.0) mArms	(4.0) mArms.	(6.0) mArms.	—
Discharging tube voltage	VL	—	(330) Vrms.	—	—
Operating life (IL=(4.0) mArms.) *3	T	(45,000) h	(58,000) h.	—	—
Operating frequency	F	(40) kHz	—	(100) kHz	—

*1 The Non-load output voltage (VS) of the inverter should be designed to have some margin, because VS may increase due to the leak current which may be caused by wiring of CFL cables. (Reference value: (1035) Vrms MIN.)

*2 We recommend that you should set the discharging tube current at lower than typical value so as to prevent the heat accumulation of CFL tube from deteriorating a performance of the LCD.

*3 Do not apply more than (6.0)mA discharging tube current. Because CFL maybe broken due to over current.

*4 When the illuminance or quantity of light has decreased to 50 % of the initial value. Average life time of CFL will be decreased when LCD is operating at lower and Higher temperature.

1 3. Design Guidance for Analog Touch-Panel(T/P)

13-1. Electrical

In customer's design, please remember the following considerations.

1. Do not use the current regulated circuit.
2. Keep the current limit with top and bottom layer. (See Sec, 4-1)
3. Analog T/P can not sense two point touching separately.
4. A contact resistance is appeared at the touch point between top and bottom layer.
After this resistance has stable read the T/P position data.
5. Analog T/P is also a "Capacitor" in an equivalent circuit.
Design your sensing circuit and low-pass filter with considering this "Capacitor" value.
6. Because noise of inverter or peripheral circuits may interfere signal of touch panel itself
it is necessary to design carefully in advance to avoid these noise problem.

13-2. Software

1. Do the "User Calibration".
2. "User Calibration" may be needed with long term using.
Include "User Calibration" menu in your software.
3. When drawing a line with a stylus, there may be a slight discontinuity when the stylus passes
over a spacer-dot. If necessary, please provide a compensation feature within your software.

13-3. Mechanical Design

13-3-1. Each "Area"

Please confirm the following information before starting your design.

(a) Key Area

"Key Area" is an area where T/P specifications (Linearity, Durability, Actuation force, etc.)
are guaranteed.

- 1) Do a touch data sensing and calibration inside this area.
- 2) In normal cases it is a same size as your flat display's "active area".
- 3) The ITO layer durability near the edge of Key area is less stronger than the center.

(b) Transparent Insulation-paste Area.

Insulation-paste is printed with 1.0mm distance outer from "Key Area".

- 1) The purpose is to avoid potential shorting problem from the bezel housing edge from or
housing "stick" when molding.
- 2) Consider your housing edge position to keep 1.0mm distance from this paste line.
(See. Fig.1)
- 3) The cross section of this edge is taper shape. So if it is over the display's active area,
it will be shining as a prism.

(c) Prohibition Area

Input by pen and finger is prohibited in this area.

Because of the thickness around T/P, the ITO layer on the PET film will be expanded and
as a conclusion it will be cracked if pressed. (See. Fig.2)

- 1) We strongly recommend that the bezel should protect this area.
- 2) An exposure of this area and stylus contact should be avoided.
- 3) When assembling at the customer, do not press this area with tools.
- 4) Consider your design to avoid the pressure by the housing bezel.

13-3-2. Example of Housing Design.

- 1) If an consumer will put a palm on housing in normal usage care should be taken as follows.
- 2) Keep the gap, for example 0.3 to 0.7mm, between bezel edge and T/P surface.
The reason is to avoid the bezel edge from contacting T/P surface that may cause a "short" with bottom layer. (See. Fig.1)
- 3) Insertion a cushion material is recommended.
- 4) The cushion material should be limited just on the bulbar insulation past area.
If it is over the transparent insulation paste area a "short" may be occurred.
- 5) If there is a probability of the touch panel surface being exposed to water, steam or other liquids, then please take measures to ensure that the bezel / touch panel gap and housing are "water tight".
- 6) There is a vent channel to equalize air pressure between the inner space of the touch panel and the atmosphere. Please make sure it is not blocked by your housing and mounting method.
There is also the possibility that moisture could percolate into the touch panel if moisture is allowed to accumulate around the air vent channel.
Furthermore, avoid high air pressures inside your housing which could cause the touch panel outer surface to swell out from inflation.

13-3-3. Mounting on display and housing bezel

- 1) In all cases, the T/P should be supported from the backside of the glass.
- 2) Do not use an adhesive tape to bond it on the front of T/P and hang it to the housing bezel.
- 3) Never expand the T/P top layer (PET-film) like a balloon by internal air pressure.
The life of the T/P will be extremely short.
- 4) If a dew will be on the heat-sealed area or exposed traces at the end of a flexible tail, the migration of silver can occur. This will cause sometimes a short circuit.

If your final product will used in a humid circumstance or will be moved from humid, warm environments to cold ones, a dew condensation can occur.

Consider a water seal with your housing bezel.

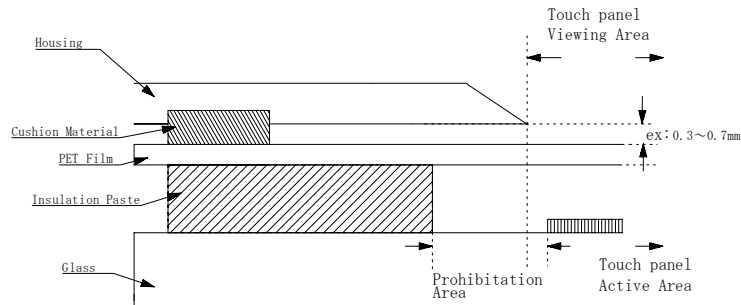


Fig. 1


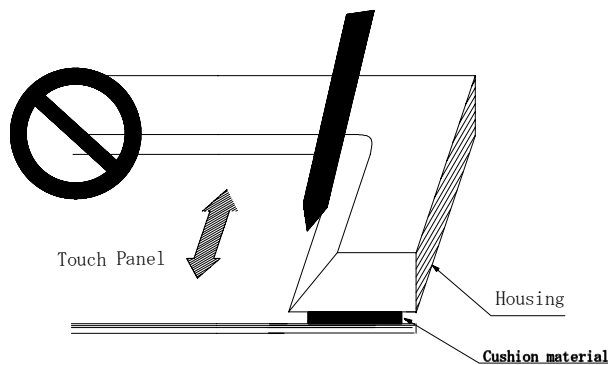


Fig. 2

1 4. Lot Number Identification

The lot number shall be indicated on the back of the backlight case of each LCD.

K G 0 5 7 Q V 1 C B - G 0 0 - □ □ - □ □ - □ □

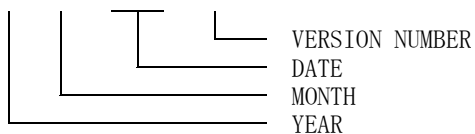

YEAR	2003	2004	2005	2006	2007	2008
CODE	3	4	5	6	7	8

MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.
CODE	1	2	3	4	5	6

MONTH	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.
CODE	7	8	9	X	Y	Z

1 5. Warranty

15-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

15-2. Production Warranty

Kyocera warrants its LCDs for a period of 12 months after receipt by the purchaser, and within the limits specified. Kyocera shall, by mutual agreement, replace or rework defective LCDs that are shown to be Kyocera's responsibility.

1 6. Precautions for use

16-1. Installation of the LCD

1. Please ground either of the mounting (screw) holes located at each corner of an LCD module, in order to stabilize brightness and display quality.
2. The LCD shall be installed so that there is no pressure on the LSI chips.
3. The LCD shall be installed flat, without twisting or bending.
4. The display window size should be the same as the effective viewing area.
5. In case you use outside frame of effective viewing area as outward appearance of your product, unevenness of its outward appearance is out of guarantee.
6. Do not pull the CFL lead wires and do not bend the root of the wires.
Housing should be designed to protect CFL lead wires from external stress.
7. This Kyocera LCD module has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas.
Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.

16-2. Static Electricity

1. Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required. Operation should wear ground straps.

16-3. LCD Operation

1. The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
2. Adjust "LCD driving voltage" to obtain optimum viewing angle and contrast.
3. Operation of the LCD at temperature below the limit specified may cause image degradation and/or bubbles.
It may also change the characteristics of the liquid crystal.
This phenomenon may not recover. The LCD shall be operated within the temperature limits specified.

16-4. Storage

1. The LCD shall be stored within the temperature and humidity limits specified.
Store in a dark area, and protected the LCD from direct sunlight or fluorescent light.
2. Always store the LCD so that it is free from external pressure onto it.


16-5. Screen Surface

1. DO NOT store in a high humidity environment for extended periods.
Image degradation, bubbles, and/or peeling off of polarizer may result.
2. Do not push or rub the touch panel's surface with hard to sharp objects such as knives, or the touch panel may be scratched.
3. When the touch panel is dirty, gently wipe the surface with a soft cloth, sometimes moistened by mild detergent or alcohol. If a hazardous chemical is dropped on the touch panel by mistake, wipe it off right away to prevent human contact.
4. Touch panel edges are sharp. Handle the touch panel with enough care to prevent cuts.
5. Always keep the LCD free from condensation during testing.
Condensation may permanently spot or stain the polarizers.

1 7. Reliability Data / Environmental Test

TEST ITEM	TEST CONDITION	TEST TIME	RESULT
High Temp. Atmosphere	60 °C	240 h.	Display Quality : No defect Display Function : No defect Current Consumption : No defect
Low Temp. Atmosphere	-20 °C	240 h.	Low Temp. Bubble : None Solid Crystallization of Liquid Crystal : None Display Quality : No defect Display Function : No defect Current Consumption : No defect
High Temp. Humidity Atmosphere	40°C 90%RH	240 h.	Display Quality : No defect Display Function : No defect Peel-off of Organic Sealing : None Current Consumption : No defect
Temp. Cycle	-20 °C 0.5 h. R.T. 0.5 h. 60 °C 0.5 h.	10cycles	Display Quality : No defect Display Function : No defect Peel-off of Organic Sealing : None Bubble on Cell : None
High Temp. Operation	60 °C Vop	500 h.	Display Quality : No defect Current Consumption : No defect

- * Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- * The LCD is tested in circumstances in which there is no condensation.
- * The tested LCD is inspected after 24 hours of storage at room temperature and room humidity after each test is finished.
- * The reliability test is not an out-going inspection.
- * The results of the reliability test are for your reference purpose only.
The reliability test is conducted only to examine the LCD's capability.

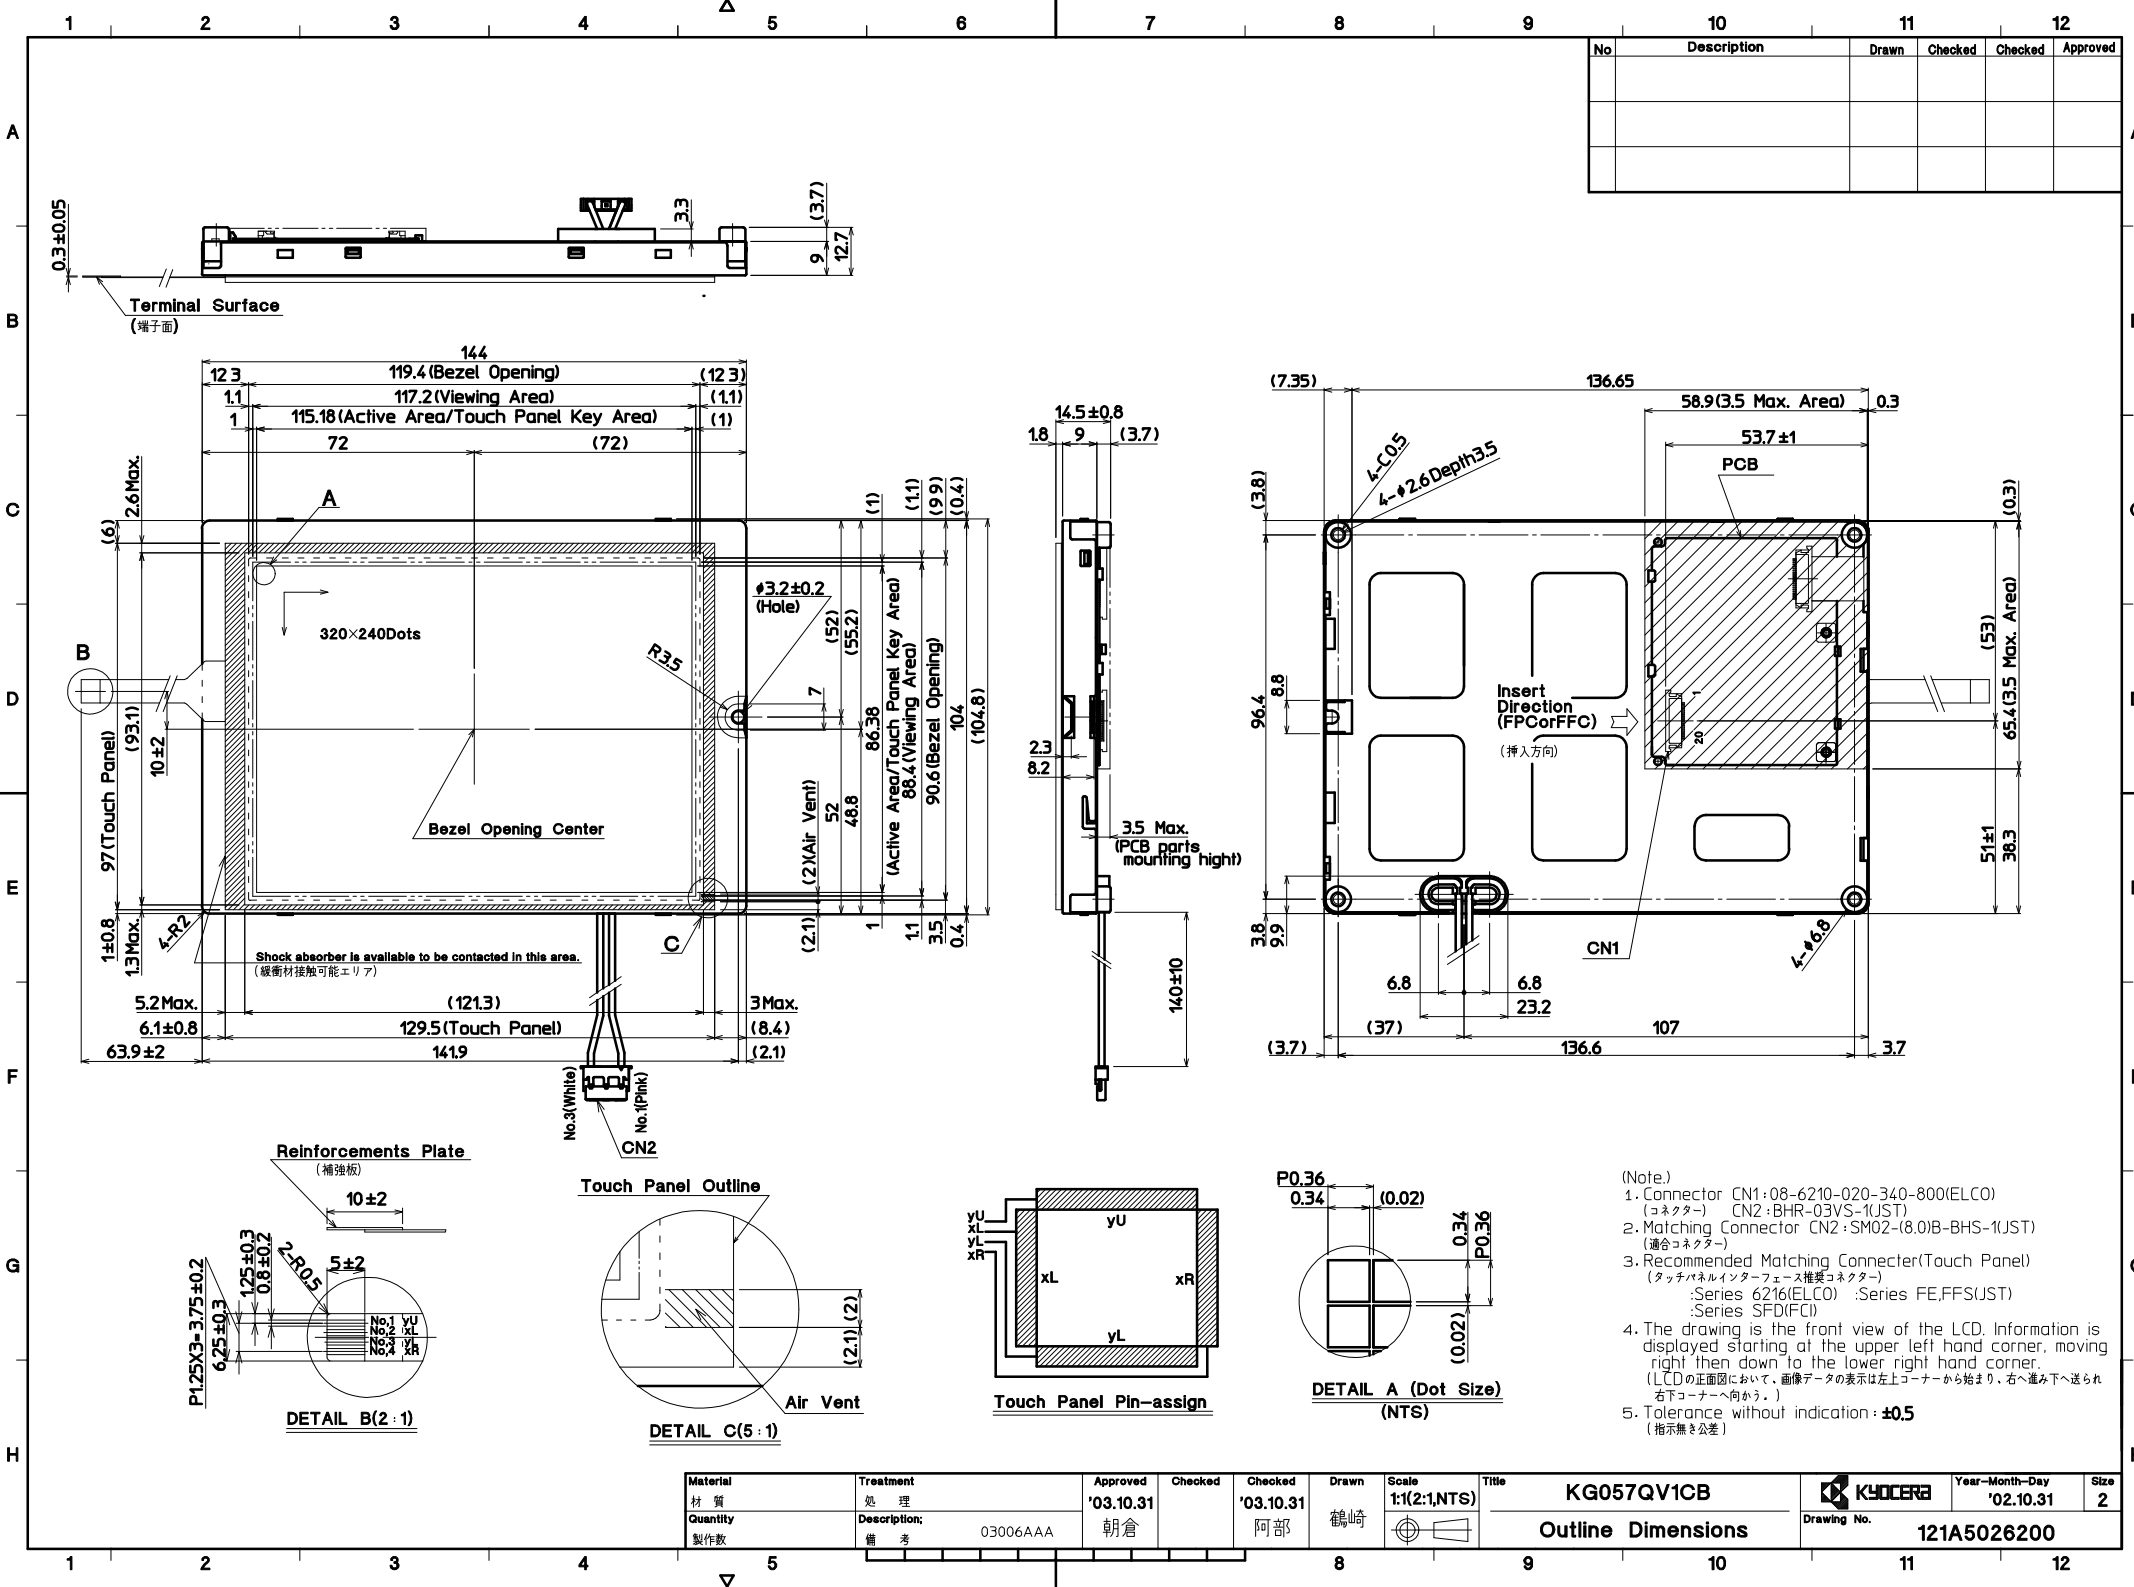

Document No.	TQ3C-8EAS0-E2CRG12-00
DATE	November 4, 2003

FOR : _____

KYOCERA INSPECTION STANDARD

TYPE : KG057QV1CB-G00

KYOCERA CORPORATION
KAGOSHIMA HAYATO PLANT
LCD DIVISION

Original	Designed by :Engineering Dept.			Confirmed by :QA Dept.	
Issue Data	Prepared	Checked	Approved	Checked	Approved
November 4, 2003	<i>W. Yano</i>	<i>M. Fujitani</i>	<i>H. Okino</i>	<i>Y. Matsumoto</i>	<i>S. Higashino</i>

Revision Record




Date	Designed by: Engineering Dept.			Confirmed by: QA Dept.	
	Prepared	Checked	Approved	Checked	Approved
Rev. No.	Date	Page	Descriptions		



Visuals specification








1)Note

Item	Note	
General	1.When defects specified in this Inspection Standards are inspected, operating voltage(Vop) shall be set at the level where optimized contrast is available. Display quality is applied up to effective viewing area. (Bi-Level INSPECTION) 2.This inspection standard about the image quality shall be applied to any defect within the effective viewing area and shall not be applicable to outside of the area. 3.Should any defects which are not specified in this standard happen, additional standard shall be determined by mutual agreement between customer and Kyocera. 4.Inspection conditions Luminance : 500 Lux minimum . Inspection distance : 300 mm (from the sample) Temperature : 25 ± 5 Direction : right above	
Definition of Inspection item	Pinhole, Bright spot Black spot, Scratch Foreign particle	The color of a small area is different from the remainder. The phenomenon does not change with voltage.
	Contrast variation	The color of a small area is different from the remainder. The phenomenon changes with voltage.
	Polarizer (Scratch, Bubble, Dent)	Scratch, Bubble and Dent in the polarizer which can be observed in on / off state.

2)Standard

Inspection item	Judgement standard																						
Pinhole, Bright spot Black spot, Foreign particle (LCD portion)	$d = (a + b) / 2$ <table><tr><th>Category</th><th>Size (mm)</th><th>Acceptable number</th></tr><tr><td>A</td><td>d 0.2</td><td>neglected</td></tr><tr><td>B</td><td>0.2 < d 0.3</td><td>5</td></tr><tr><td>C</td><td>0.3 < d 0.5</td><td>3</td></tr><tr><td>D</td><td>0.5 < d</td><td>0</td></tr></table>	Category	Size (mm)	Acceptable number	A	d 0.2	neglected	B	0.2 < d 0.3	5	C	0.3 < d 0.5	3	D	0.5 < d	0							
Category	Size (mm)	Acceptable number																					
A	d 0.2	neglected																					
B	0.2 < d 0.3	5																					
C	0.3 < d 0.5	3																					
D	0.5 < d	0																					
Scratch,Foreign particle (LCD portion)	 <table><tr><th></th><th>Width (mm)</th><th>Length (mm)</th><th>Acceptable No.</th></tr><tr><td>A</td><td>W 0.03</td><td>—</td><td>neglected</td></tr><tr><td>B</td><td rowspan="3">0.03 < W 0.1</td><td>L 2.0</td><td>neglected</td></tr><tr><td>C</td><td>2.0 < L 4.0</td><td>3</td></tr><tr><td>D</td><td>4.0 < L</td><td>0</td></tr><tr><td>E</td><td>0.1 < W</td><td>—</td><td>According to 'Circular'</td></tr></table>		Width (mm)	Length (mm)	Acceptable No.	A	W 0.03	—	neglected	B	0.03 < W 0.1	L 2.0	neglected	C	2.0 < L 4.0	3	D	4.0 < L	0	E	0.1 < W	—	According to 'Circular'
	Width (mm)	Length (mm)	Acceptable No.																				
A	W 0.03	—	neglected																				
B	0.03 < W 0.1	L 2.0	neglected																				
C		2.0 < L 4.0	3																				
D		4.0 < L	0																				
E	0.1 < W	—	According to 'Circular'																				
Contrast variation	$d = (a + b) / 2$ <table><tr><th>Category</th><th>Size (mm)</th><th>Acceptable number</th></tr><tr><td>A</td><td>d 0.5</td><td>neglected</td></tr><tr><td>B</td><td>0.5 < d 0.7</td><td>3</td></tr><tr><td>C</td><td>0.7 < d</td><td>0</td></tr></table>	Category	Size (mm)	Acceptable number	A	d 0.5	neglected	B	0.5 < d 0.7	3	C	0.7 < d	0										
Category	Size (mm)	Acceptable number																					
A	d 0.5	neglected																					
B	0.5 < d 0.7	3																					
C	0.7 < d	0																					

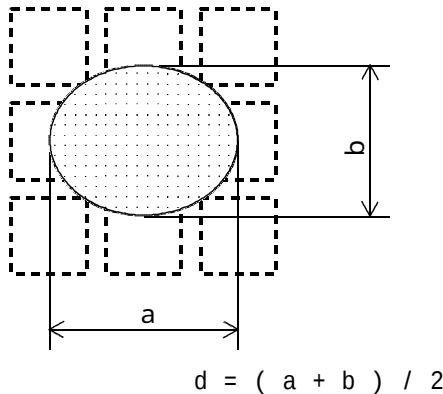Inspection item	Judgement standard																		
Polarizer (Scratch, Bubble, Dent)	(1) Scratch 																		
	<table><tr><th></th><th>Width (mm)</th><th>Length (mm)</th><th>Acceptable No.</th></tr><tr><td>A</td><td>W 0.1</td><td>—</td><td>neglected</td></tr><tr><td>B</td><td rowspan="2">0.1 < W 0.3</td><td>L 5.0</td><td>neglected</td></tr><tr><td>C</td><td>5.0 < L</td><td>0</td></tr><tr><td>D</td><td>0.3 < W</td><td>—</td><td>0</td></tr></table>		Width (mm)	Length (mm)	Acceptable No.	A	W 0.1	—	neglected	B	0.1 < W 0.3	L 5.0	neglected	C	5.0 < L	0	D	0.3 < W	—
	Width (mm)	Length (mm)	Acceptable No.																
A	W 0.1	—	neglected																
B	0.1 < W 0.3	L 5.0	neglected																
C		5.0 < L	0																
D	0.3 < W	—	0																
	(2)Bubble (dent)  $d = (a + b) / 2$																		
	<table><tr><th>Category</th><th>Size (mm)</th><th>Acceptable number</th></tr><tr><td>A</td><td>d 0.2</td><td>neglected</td></tr><tr><td>B</td><td>0.2 < d 0.3</td><td>5</td></tr><tr><td>C</td><td>0.3 < d 0.5</td><td>3</td></tr><tr><td>D</td><td>0.5 < d</td><td>0</td></tr></table>	Category	Size (mm)	Acceptable number	A	d 0.2	neglected	B	0.2 < d 0.3	5	C	0.3 < d 0.5	3	D	0.5 < d	0			
Category	Size (mm)	Acceptable number																	
A	d 0.2	neglected																	
B	0.2 < d 0.3	5																	
C	0.3 < d 0.5	3																	
D	0.5 < d	0																	

Inspection item	Judgement standard																																					
Scratch, Foreige particle (Touch Screen portion)	(D = Average Diameter = (major axis + minor axis) / 2)																																					
	<table><tr><td></td><td>Width(mm)</td><td>Length(mm)</td><td>Acceptable No.</td></tr><tr><td rowspan="4">Scratch</td><td>0.1 W > 0.08</td><td>4 L</td><td>1pcs within ϕ 30mm</td></tr><tr><td>0.08 W > 0.05</td><td>6 L</td><td>2pcs within ϕ 20mm</td></tr><tr><td>0.05 W > 0.03</td><td>10 L</td><td>2pcs within ϕ 20mm</td></tr><tr><td>0.03 W</td><td>20 L</td><td>neglected</td></tr><tr><td rowspan="2">Foreige (line like)</td><td>0.1 W > 0.05</td><td>5 L</td><td>2pcs within ϕ 30mm</td></tr><tr><td>0.05 W</td><td>neglected</td><td>neglected</td></tr><tr><td rowspan="2">Foreige (circle like)</td><td>0.3 D > 0.2</td><td colspan="2">2pcs within ϕ 30mm</td></tr><tr><td>0.2 D</td><td colspan="2">neglected</td></tr></table>		Width(mm)	Length(mm)	Acceptable No.	Scratch	0.1 W > 0.08	4 L	1pcs within ϕ 30mm	0.08 W > 0.05	6 L	2pcs within ϕ 20mm	0.05 W > 0.03	10 L	2pcs within ϕ 20mm	0.03 W	20 L	neglected	Foreige (line like)	0.1 W > 0.05	5 L	2pcs within ϕ 30mm	0.05 W	neglected	neglected	Foreige (circle like)	0.3 D > 0.2	2pcs within ϕ 30mm		0.2 D	neglected							
		Width(mm)	Length(mm)	Acceptable No.																																		
	Scratch	0.1 W > 0.08	4 L	1pcs within ϕ 30mm																																		
		0.08 W > 0.05	6 L	2pcs within ϕ 20mm																																		
		0.05 W > 0.03	10 L	2pcs within ϕ 20mm																																		
		0.03 W	20 L	neglected																																		
	Foreige (line like)	0.1 W > 0.05	5 L	2pcs within ϕ 30mm																																		
		0.05 W	neglected	neglected																																		
	Foreige (circle like)	0.3 D > 0.2	2pcs within ϕ 30mm																																			
0.2 D		neglected																																				
Above are applied to the visible area. Unless there are foreign particles and damage affected seriously to the electrical performance in the visible area, we approve of this product.																																						
Glass crack (Touch Screen portion)	<table><tr><td rowspan="4">Judgeme nt stan dard</td><td colspan="3">Corner crack</td><td colspan="3">Cracks in other area than in corner</td></tr><tr><td colspan="3"></td><td colspan="3"></td></tr><tr><td>X</td><td>Y</td><td>Z</td><td>X</td><td>Y</td><td>Z</td></tr><tr><td>3</td><td>3</td><td><t</td><td>5</td><td>1.5</td><td><t</td></tr><tr><td colspan="3">2pcs/panel</td><td colspan="3">2pcs/side</td></tr></table>	Judgeme nt stan dard	Corner crack			Cracks in other area than in corner									X	Y	Z	X	Y	Z	3	3	<t	5	1.5	<t	2pcs/panel			2pcs/side								
			Judgeme nt stan dard	Corner crack			Cracks in other area than in corner																															
																																						
				X	Y	Z	X	Y	Z																													
		3		3	<t	5	1.5	<t																														
	2pcs/panel			2pcs/side																																		
	Judgeme nt stan dard	Progressive crack																																				
																																						
		0pcs(NG even 1pcs)																																				
		Above are applied to the visible area. Unless there are foreign particles and damage affected seriously to the electrical performance in the visible area, we approve of this product.																																				